


DCB

141135

141x135x168mm(5.55"x5.31"x6.61")

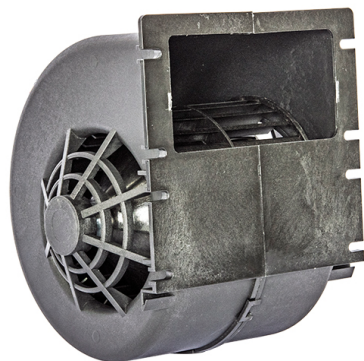


HOUSING	Plastic
IMPELLER	Plastic
BEARING	Ball
INSULATION	Class A
OPERATING TEMPERATURE	-20°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1.5 Kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

141mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCB141135V24SLB	24	6.9	165.6	3480	2.75	70	299	8.47	76
DCB141135V24HB	24	3.7	88.8	2780	1.97	50	261	7.4	72
DCB141135V12MB	12	7.1	85.2	2255	1.22	31	194	5.5	68

DIMENSION

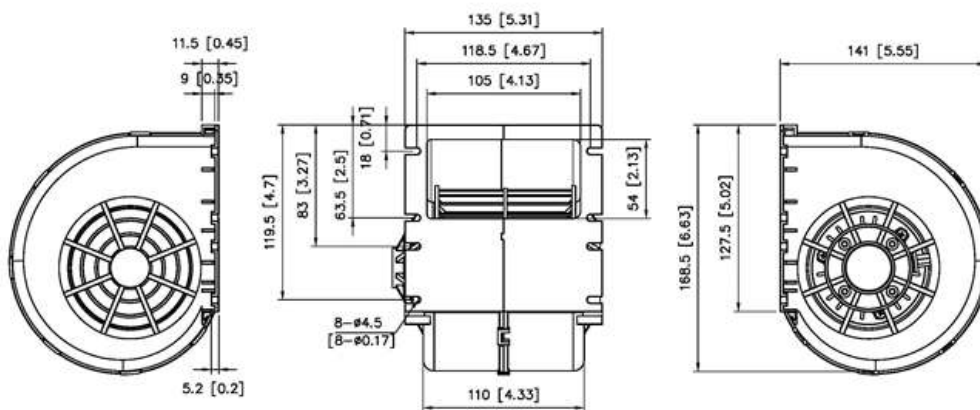

UNIT:mm[inch]

SYMBANG

AIR PERFORMANCE

