


DF

30-3P

Ø30mm(Ø1.18")



The drawing is for reference only;
actual image is based on the real product.


HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø30mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

30mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
©DF30830V24HB-3P	24	0.28	6.72	2650	0.063	1.6	148.41	4.2	34
©DF30730V24HB-3P	24	0.25	6.00	2750	0.067	1.7	137.81	3.9	35
©DF30630V24HB-3P	24	0.220	5.28	2850	0.07	1.8	113.07	3.2	36

DIMENSION

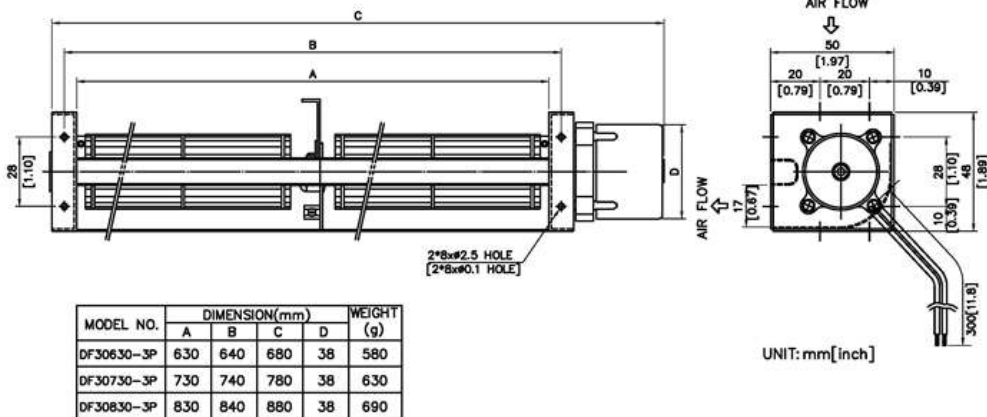

AIR PERFORMANCE

