


DF

45-3P

CE

Ø45mm(Ø1.77")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø45mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

45mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DF45870V24HB-3P	24	0.63	15.12	1800	0.11	2.8	265.02	7.5	45
DF45750V24HB-3P	24	0.59	14.16	1850	0.110	2.8	236.75	6.7	45
DF45630V24HB-3P	24	0.55	13.20	1950	0.114	2.9	201.41	5.7	46

DIMENSION

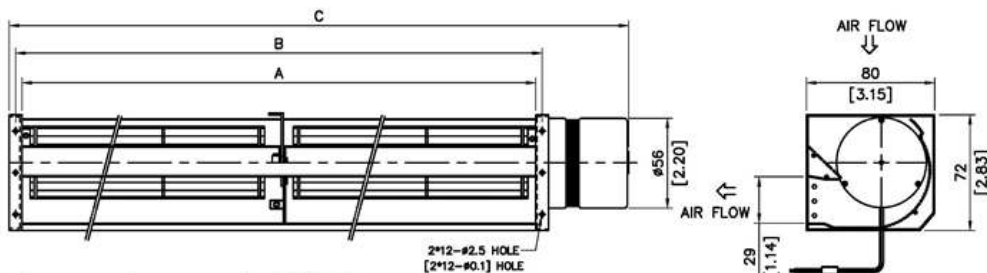

MODEL NO.	DIMENSION(mm)			WEIGHT (Kg)
	A	B	C	
DF45630-3P	630	640	685	1.10
DF45750-3P	750	760	805	1.25
DF45870-3P	870	880	925	1.35

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

