

DFH 60-3P



Ø60mm(Ø2.36")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFH60606V24HB-3P	24	0.57	13.68	1900	0.055	1.4	148.41	4.2	36
DFH60426V24HB-3P	24	0.29	6.96	1600	0.063	1.6	95.41	2.7	33
DFH60366V24HB-3P	24	0.28	6.72	1700	0.055	1.4	81.27	2.3	34
DFH60306V24HB-3P	24	0.26	6.24	1900	0.051	1.3	74.20	2.1	35

DIMENSION

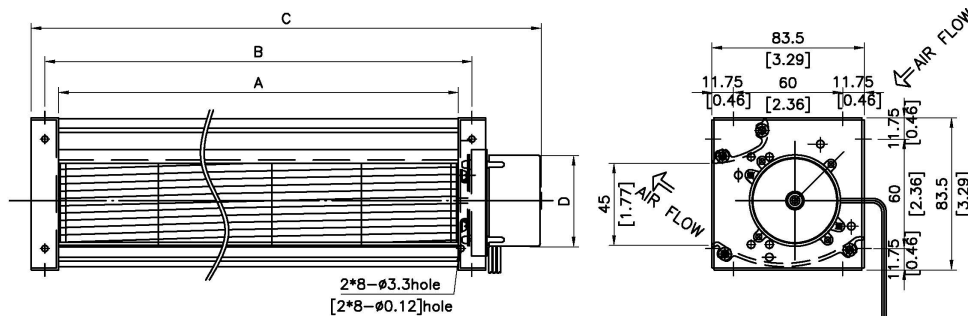

MODEL NO.	DIMENSION(mm)				WEIGHT (g)
	A	B	C	D	
DFH60306-3P	306	321	351	38	680
DFH60366-3P	366	381	411	38	740
DFH60426-3P	426	441	471	38	810
DFH60606-3P	606	621	664	56	1260

UNIT:mm[inch]

AIR PERFORMANCE

