

DFM 60-3P

CE
Ø60mm(Ø2.36")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFM60870V24HB-3P	24	0.86	20.64	2350	0.087	2.2	289.8	8.2	42
DFM60710V24HB-3P	24	0.79	18.96	2350	0.087	2.2	243.8	6.9	42
DFM60610V24HB-3P	24	0.73	17.52	2400	0.091	2.3	219.1	6.2	43
DFM60530V24HB-3P	24	0.69	16.56	2450	0.091	2.3	197.9	5.6	43
DFM60430V24HB-3P	24	0.63	15.12	2550	0.095	2.4	162.5	4.6	44
DFM60370V24HB-3P	24	0.58	13.92	2600	0.099	2.5	137.8	3.9	45
DFM60310V24HB-3P	24	0.53	12.72	2650	0.099	2.5	116.6	3.3	45

DIMENSION

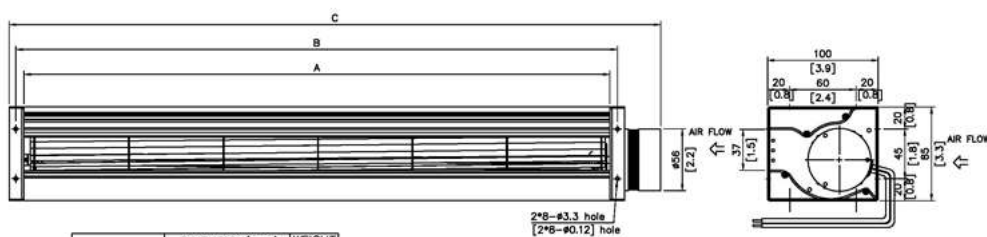

MODEL NO.	DIMENSION(mm)			WEIGHT (g)
	A	B	C	
DFM60310-3P	310	325	370	950
DFM60370-3P	370	385	430	1000
DFM60430-3P	430	445	490	1100
DFM60530-3P	530	545	590	1250
DFM60610-3P	610	625	670	1350
DFM60710-3P	710	725	770	1450
DFM60870-3P	870	885	953	1900

UNIT:mm[inch]

SYMBANG

AIR PERFORMANCE

