

DFB 60L-3P

CE
Ø60mm(Ø2.36")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFB60406V48HBL-3P	48	1.1	52.80	3150	0.319	8.1	328.62	9.3	60
DFB60368V48HBL-3P	48	1.1	52.80	3300	0.339	8.6	289.75	8.2	60
DFB60306V48HBL-3P	48	1.0	48.00	3500	0.394	10.0	265.02	7.5	62
DFB60306V24HBL-3P	24	2.3	55.20	3500	0.394	10.0	265.02	7.5	62

DIMENSION

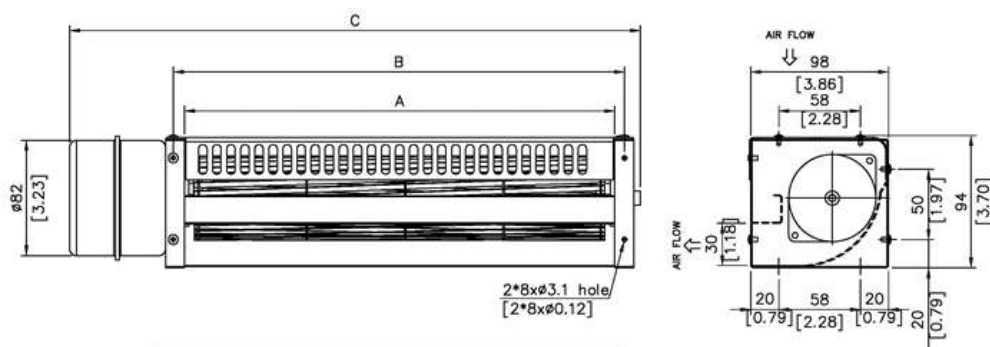

MODEL NO.	DIMENSION(mm)			WEIGHT (kg)
	A	B	C	
DFB60306V24HBL-3P	306	321	406	1.4
DFB60306V48HBL-3P	306	321	406	1.4
DFB60368V48HBL-3P	368	383	469	1.6
DFB60406V48HBL-3P	406	444	530	1.8

UNIT:mm[inch]

AIR PERFORMANCE

