

DFG

60-3P

CE

Ø60mm(Ø2.36")



HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request


60

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFG60360V24HB-3P	24	0.66	15.84	1750	0.209	5.3	197.88	5.6	46
DFG60300V24HB-3P	24	0.59	14.16	1850	0.217	5.5	166.08	4.7	47
DFG60240V24HB-3P	24	0.51	12.24	2000	0.24	6.1	137.81	3.9	49
DFG60180V24HB-3P	24	0.28	6.72	1600	0.181	4.6	77.74	2.2	44
DFG60120V24HB-3P	24	0.24	5.76	2000	0.252	6.4	63.60	1.8	49

DIMENSION

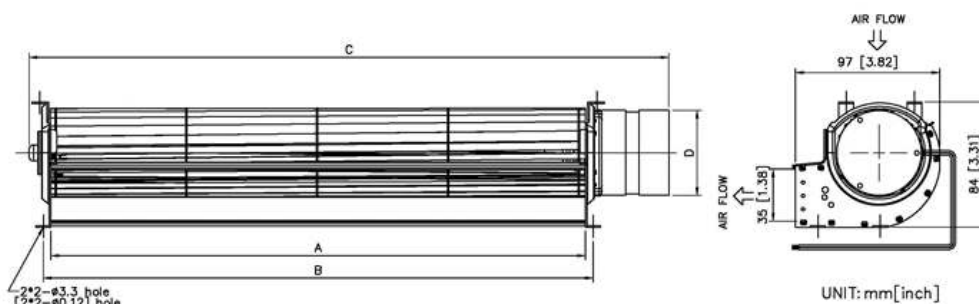

MODEL NO.	DIMENSION(mm)				WEIGHT (g)
	A	B	C	D	
DFG60120-3P	120	130	170	38	400
DFG60180-3P	180	190	230	38	570
DFG60240-3P	240	250	310	56	790
DFG60300-3P	300	310	370	56	860
DFG60360-3P	360	370	430	56	950

SYMBANG

AIR PERFORMANCE

