

DF

65-3P

CE

Ø65mm(Ø2.56")




HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø65mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

65 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DF65880V24HB-3P ◎	24	1.45	34.80	1600	0.18	4.6	477.03	13.5	48
DF65720V24HB-3P ◎	24	1.38	33.12	1650	0.19	4.8	445.23	12.6	50
DF65620V24HB-3P	24	1.32	31.68	1700	0.19	4.9	395.76	11.2	50
DF65520V24HB-3P	24	1.20	28.80	1850	0.21	5.3	342.76	9.7	54
DF65435V24HB-3P	24	0.71	17.04	1550	0.16	4.0	229.68	6.5	47
DF65435V12HB-3P	12	1.49	17.88	1550	0.16	4.0	229.68	6.5	47
DF65375V24HB-3P	24	0.70	16.80	1600	0.17	4.2	219.08	6.2	48
DF65375V12HB-3P	12	1.44	17.28	1600	0.17	4.2	219.08	6.2	48
DF65315V24HB-3P	24	0.60	14.40	1700	0.17	4.4	187.23	5.3	49
DF65315V12HB-3P	12	1.27	15.24	1700	0.17	4.4	187.23	5.3	49

DIMENSION

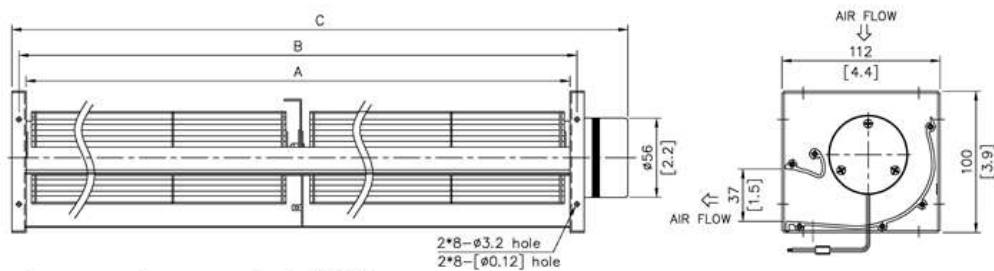

MODEL NO.	DIMENSION(mm)			WEIGHT (kg)
	A	B	C	
DF65315-3P	315	327	373	1.0
DF65375-3P	375	387	433	1.1
DF65435-3P	435	447	493	1.2
DF65520-3P	520	532	601	1.4
DF65620-3P	620	632	701	1.6
DF65720-3P	720	732	801	1.7
DF65880-3P	880	892	961	2.0

UNIT: mm[inch]

SYMBANG



AIR PERFORMANCE

