

ACF

305112-HL

CE

Ø305x112 mm, 4 poles(Ø12.01"x4.41")




MOTOR	Outer rotor motor Ø90mm
IMPELLER	Aluminum
BEARING	Ball
INSULATION	Class A
TERMINATION	Lead Wire
OPERATING TEMPERATURE	0°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	4.8 kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

305mm


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF305112V2H4PS-HL	220	0.69	155	1575	1.21	30.7	901	25.5	54

DIMENSION

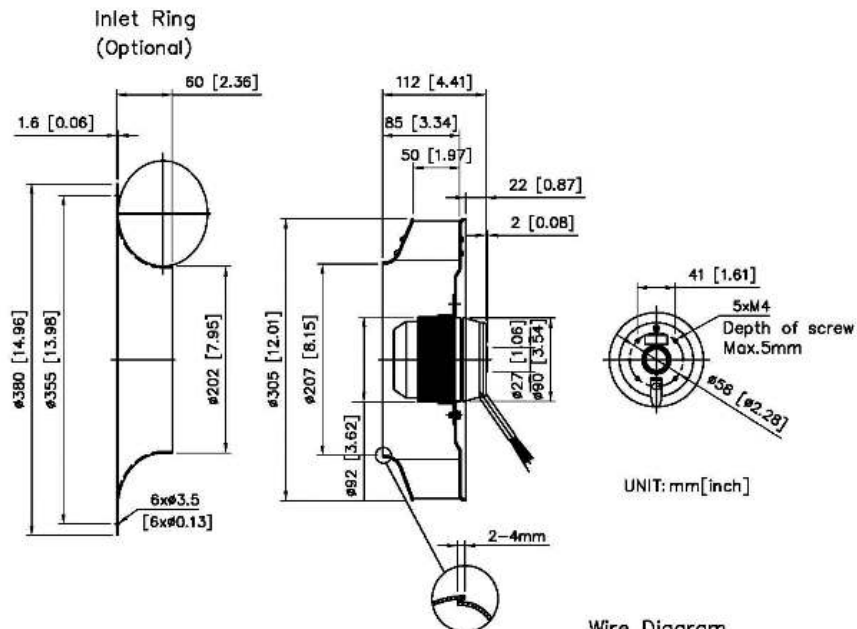

Wire Diagram

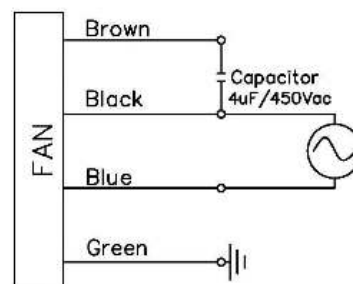



AIR PERFORMANCE

