

DCF

19068-LD

CE

Ø190x68mm(Ø7.48"x2.68")




IMPELLER	Plastic Impeller, Metal Plate
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	-25°C to +60°C
TERMINATION	Lead Wire
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	1.35 Kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

190mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF19068V48HB-LD	48	1.70	76	3200	1.93	48.96	427	12.09	70
DCF19068V24HB-LD	24	3.30	76	3200	1.93	48.96	427	12.09	70

DIMENSION

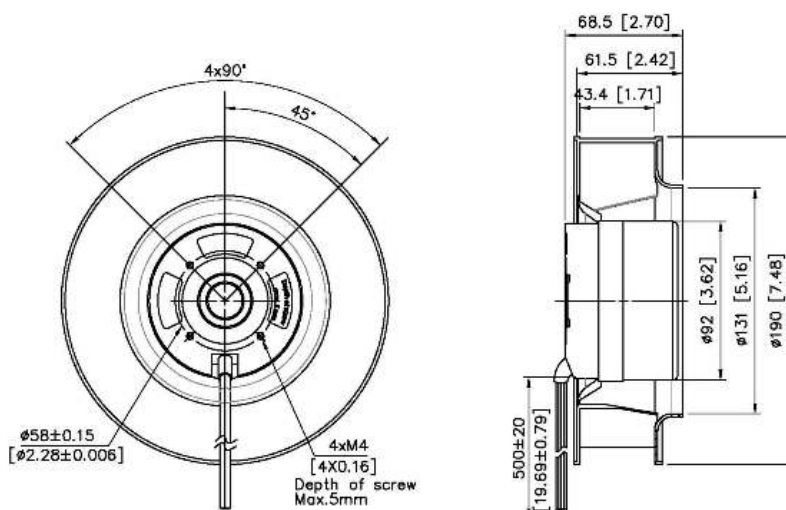

UNIT: mm[inch]

Wiring Diagram

- Red — +VDC
- Blue — GND
- Yellow — 0-10V/PWM Speed Control
- White — Tachometer (FG)

SYMBANG

AIR PERFORMANCE

