

AB

208177-LC

CE

208x177mm(8.19"x6.97")



HOUSING	Alumiumn Alloy
BEARING	Ball
OPERATING TEMPERATURE	35°C to 45°C
INSULATION	Class E
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	3.6 kgs
ROHS COMPLIANCE	YES
IP LEVEL	IP54




208mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
AB208177V3H2PT-LC	380	0.30	40	2800	1.97	50	120	3.4	45
AB208177V2H2PT-LC	220	0.40	40	3500	2.36	60	152	4.3	50
AB208177DVH2PS-LC	110/220	2/1	40	3500	2.36	60	152	4.3	50

DIMENSION

SYMBANG

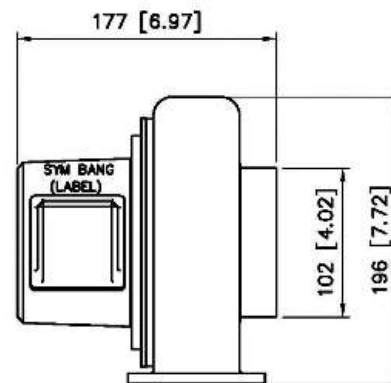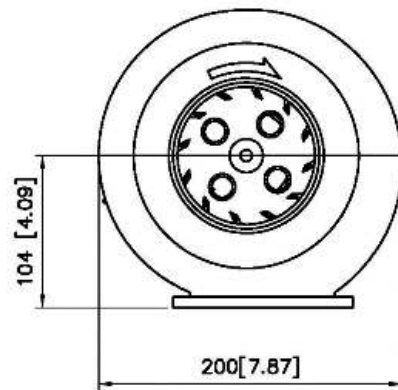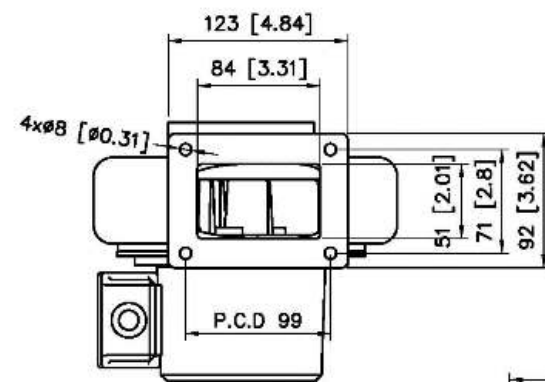

UNIT: mm[inch]

AIR PERFORMANCE

