

D

28080M-LD

CE

280x280x80mm(11.02"x11.02"x3.15")




HOUSING	Aluminum Die Casting
IMPELLER	Metal
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	-20°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	2.45 kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

280mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D28080V48HBM-LD	48	2.1	100	2750	1.29	32.65	1118	31.64	76
D28080V24HBM-LD	24	4.2	100	2750	1.29	32.65	1118	31.64	74

DIMENSION

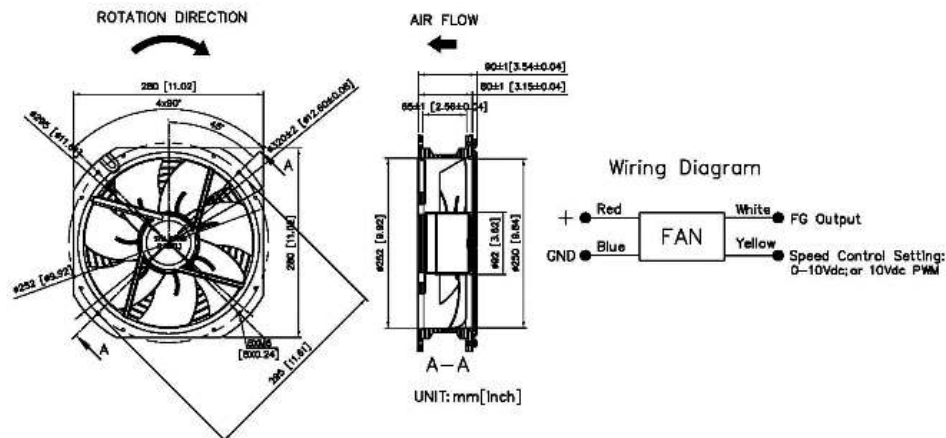

AIR PERFORMANCE

