


DB

6025-TK

60x60x25mm(2.36"x2.36"x0.98")

CE

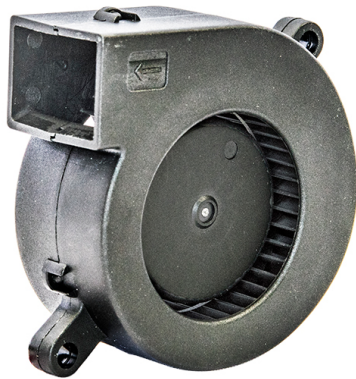

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +70°
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	63 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

60mm


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB6025V24SL-TK	24	0.13	3.00	4500	0.75	18.95	8.66	0.245	42.5
DB6025V24H-TK	24	0.10	2.40	4000	0.57	14.48	7.74	0.219	39.7
DB6025V24L-TK	24	0.07	1.68	3300	0.40	10.27	6.22	0.176	33.0
DB6025V24M-TK	24	0.08	1.92	3600	0.43	10.94	6.71	0.190	34.7
DB6025V24XL-TK	24	0.05	1.20	3000	0.28	7.03	5.62	0.159	31.0
DB6025V24SM-TK	24	0.15	3.60	5000	1.00	25.49	9.75	0.276	46.4
DB6025V12XL-TK	12	0.10	1.20	3000	0.28	7.03	5.62	0.159	31.0
DB6025V12L-TK	12	0.14	1.68	3300	0.40	10.27	6.22	0.176	33.0
DB6025V12M-TK	12	0.16	1.92	3600	0.43	10.94	6.71	0.190	34.7
DB6025V12H-TK	12	0.20	2.40	4000	0.57	14.48	7.74	0.219	39.7
DB6025V12SL-TK	12	0.25	3.00	4500	0.75	18.95	8.66	0.245	42.5
DB6025V12SM-TK	12	0.30	3.60	5000	1.00	25.49	9.75	0.276	46.4


SYMBANG

DIMENSION

AIR FLOW

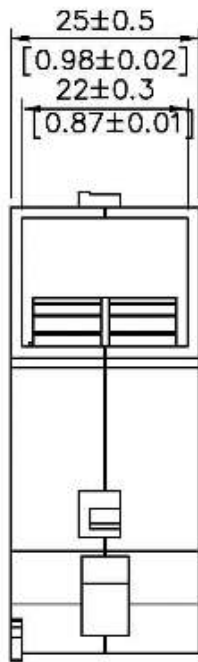

UNIT: mm[inch]

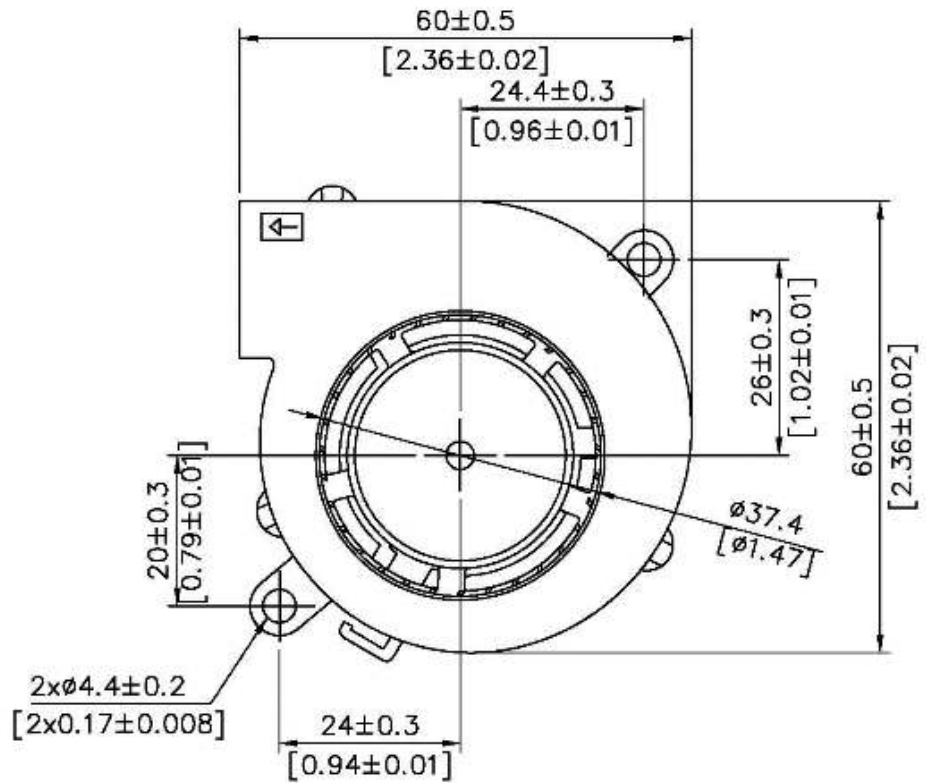

AIR PERFORMANCE

