


DB

6015-TK

60x60x15mm(2.36"x2.36"x0.59")

CE

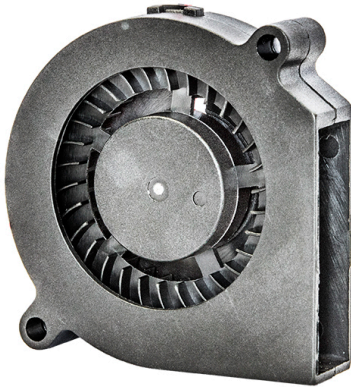

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to +70°
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	33.7 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


60 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB6015V24SH-TK	24	0.18	4.32	5000	0.654	16.62	4.54	0.129	43.5
DB6015V24SM-TK	24	0.16	3.84	4500	0.500	12.70	4.13	0.117	40.5
DB6015V24L-TK	24	0.05	1.20	2500	0.130	3.31	2.24	0.063	24.4
DB6015V24M-TK	24	0.07	1.68	3000	0.202	5.12	2.78	0.079	29.5
DB6015V24H-TK	24	0.11	2.64	3500	0.281	7.13	3.16	0.089	33.6
DB6015V24SL-TK	24	0.15	3.60	4000	0.383	9.72	3.67	0.104	36.9
DB6015V12L-TK	12	0.10	1.20	2500	0.130	3.31	2.24	0.063	24.4
DB6015V12M-TK	12	0.14	1.68	3000	0.202	5.12	2.78	0.079	29.5
DB6015V12H-TK	12	0.22	2.64	3500	0.281	7.13	3.16	0.089	33.6
DB6015V12SL-TK	12	0.30	3.60	4000	0.383	9.72	3.67	0.104	36.9
DB6015V12SM-TK	12	0.35	4.20	4500	0.500	12.70	4.13	0.117	40.5
DB6015V12SH-TK	12	0.40	4.80	5000	0.654	16.62	4.54	0.129	43.5

SYMBANG

DIMENSION

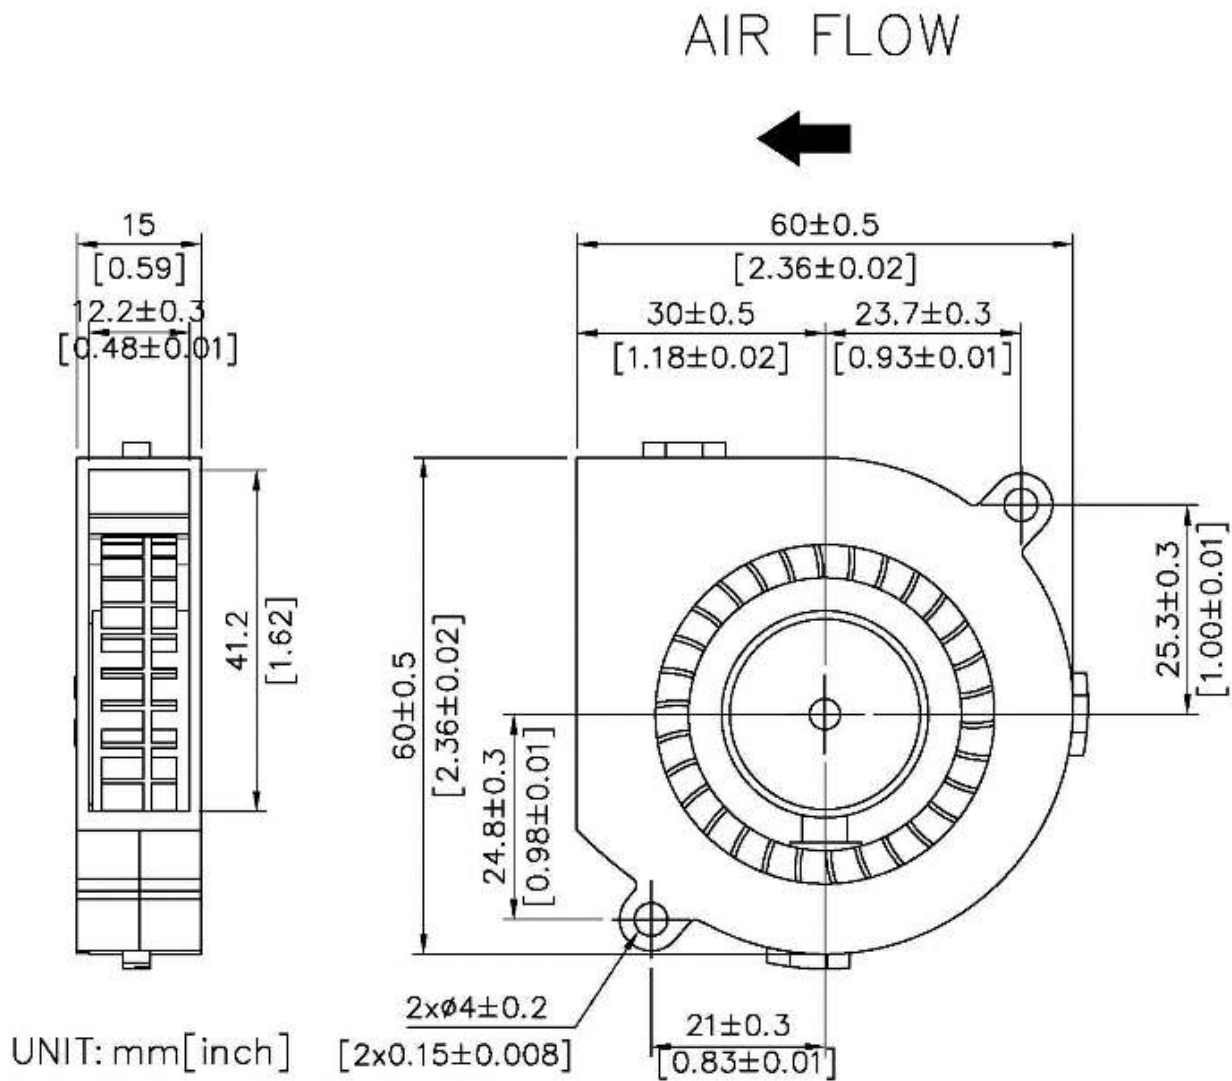

AIR PERFORMANCE

