

DCF

400157-LD

Ø400x157mm (Ø15.75"x6.2")



IMPELLER
BEARING
INSULATION
OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION RESISTANCE
WEIGHT
ROHS COMPLIANCE
IP LEVEL

Metal
Ball
Class F
-25°C to + 60°
5mA Max. at 500 VAC for 1 minute
10M Ω min. @500 VDC
5 kgs
Yes
IP44 (Special IP Rating On Request)



400

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF400157V48HB-LD	48	3.8	180	1260	1.69	42.83	1766	50.01	73

DIMENSION

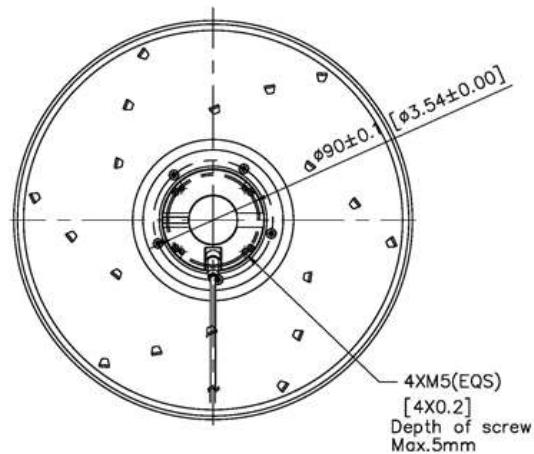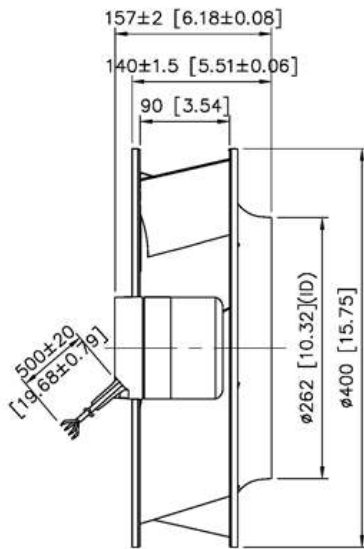

UNIT: mm[inch]

AIR PERFORMANCE

