

DB

15086- HD-3P

CE

150x131x86mm(5.91"x5.16"x3.39")



HOUSING
IMPELLER
MOTOR
BEARING
OPERATING TEMPERATURE
DIELECTRIC STRENGTH
INSULATION
WEIGHT
ROHS COMPLIANCE
IP LEVEL


Eletroplate steel sheet
Aluminum sheet
High Volt. BLDC Internal Rotor
Ball
-20°C to + 60°C
5mA Max. at 500 VAC for 1 minute
Class E
800g
Yes
IP21 (Special IP Rating On Request)

150mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB15086V40HB-HD-3P	40	1.90	76	5100	2.4	61	51.25	1.45	68

DIMENSION

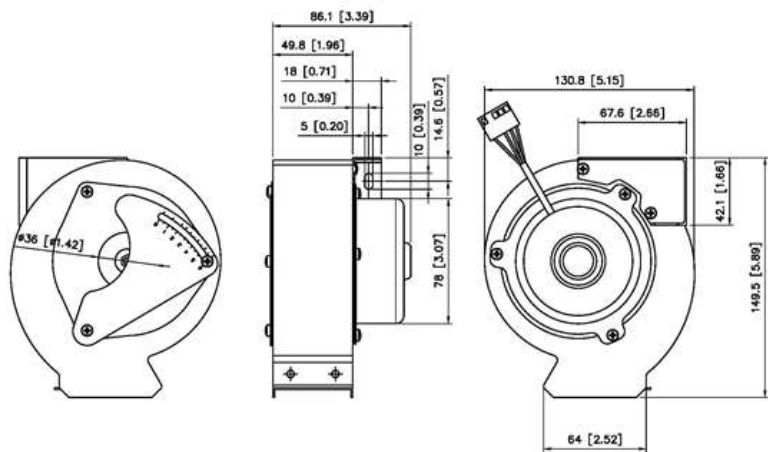


UNIT: mm[inch]

Connection leads

PIN NO.	SIGNAL	COLOR
1	Vs	RED
2	Vcc	YELLOW
3	GND	BLUE
4	FG	WHITE

Power On Sequence	Vcc ON→Vs ON
Power Off Sequence	Vs ON→Vcc ON

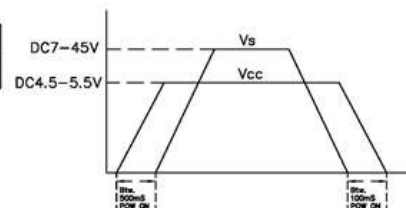

AIR PERFORMANCE

