

D

6010F-YH

CE

60x60x10mm(2.36"x2.36"x0.39")



IMPELLER

BEARING

OPERATING TEMPERATURE

DIELECTRIC STRENGTH

INSULATION RESISTANCE

WEIGHT

ROHS COMPLIANCE

IP LEVEL

Thermoplastic PBT, UL94V-0

Ball or sleeve

-10°C to + 60°C

5mA Max. at 500 VAC for 1 minute

10M Ω min. @500 VDC

20.4 g

Yes

IP21 (Special IP Rating On Request)


60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D6010V24LF-YH	24	0.03	0.72	3000	0.10	2.64	10.74	0.30	21.6
D6010V24MF-YH	24	0.07	1.68	4000	0.14	3.52	14.32	0.41	28.8
D6010V24HF-YH	24	0.12	2.88	4500	0.16	3.97	16.11	0.46	30.8
D6010V24SLF-YH	24	0.18	4.32	5000	0.17	4.41	17.89	0.51	33.1
D6010V12LF-YH	12	0.06	0.72	3000	0.10	2.64	10.74	0.30	21.6
D6010V12MF-YH	12	0.15	1.80	4000	0.14	3.52	14.32	0.41	28.8
D6010V12HF-YH	12	0.25	3.00	4500	0.16	3.97	16.11	0.46	30.8
D6010V12SLF-YH	12	0.37	4.44	5000	0.17	4.41	17.89	0.51	33.1
D6010V5MF-YH	5	0.15	0.75	3000	0.10	2.64	10.74	0.30	21.6
D6010V5LF-YH	5	0.39	1.95	4000	0.14	3.52	14.32	0.41	28.8

DIMENSION

SYMBANG

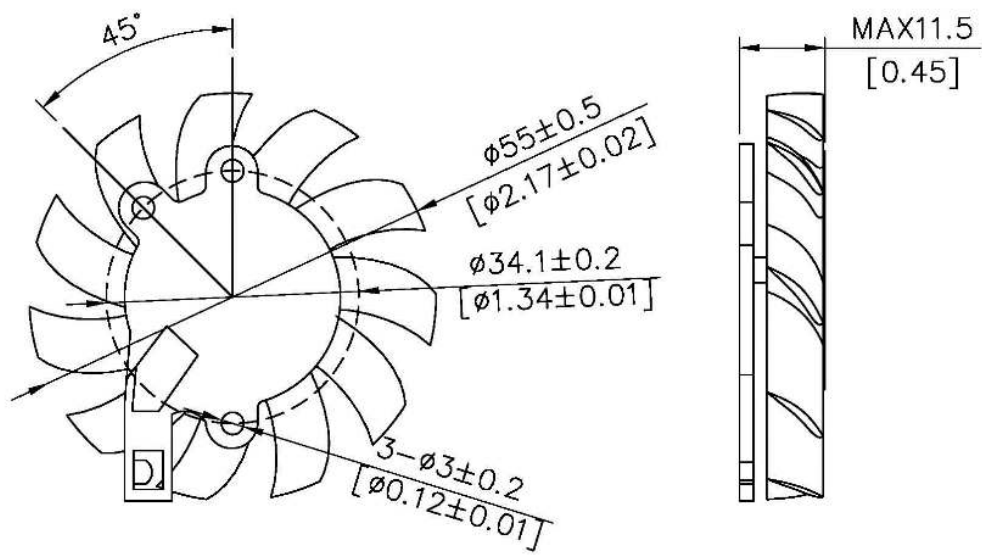

UNIT: mm[inch]

AIR PERFORMANCE

