

D

9017F-YH

CE

90x90x17mm(3.54"x3.54"x0.67")



IMPELLER

BEARING

OPERATING TEMPERATURE

DIELECTRIC STRENGTH

INSULATION RESISTANCE

WEIGHT

ROHS COMPLIANCE

IP LEVEL

Thermoplastic PBT, UL94V-2

Ball or sleeve

-10°C to + 60°C

5mA Max. at 500 VAC for 1 minute

10M Ω min. @500 VDC

86.25 g

Yes

IP21 (Special IP Rating On Request)


90 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D9017V24XLF-YH	24	0.02	0.48	1500	0.12	3.07	22.87	0.65	22.3
D9017V24LF-YH	24	0.03	0.72	2000	0.16	4.09	30.49	0.86	25.8
D9017V24MF-YH	24	0.07	1.68	2500	0.20	5.11	38.11	1.08	30.6
D9017V24HF-YH	24	0.13	3.12	3000	0.24	6.13	45.73	1.30	33.9
D9017V24SLF-YH	24	0.22	5.28	3500	0.28	7.16	53.36	1.51	37.8
D9017V12XLF-YH	12	0.03	0.36	1500	0.12	3.07	22.87	0.65	22.3
D9017V12LF-YH	12	0.07	0.84	2000	0.16	4.09	30.49	0.86	25.8
D9017V12MF-YH	12	0.14	1.68	2500	0.20	5.11	38.11	1.08	30.6
D9017V12HF-YH	12	0.28	3.36	3000	0.24	6.13	45.73	1.30	33.9
D9017V12SLF-YH	12	0.47	5.64	3500	0.28	7.16	53.36	1.51	37.8
D9017V5XLF-YH	5	0.08	0.40	1500	0.12	3.07	22.87	0.65	25.8
D9017V5LF-YH	5	0.18	0.90	2000	0.16	4.09	30.49	0.86	30.6
D9017V5MF-YH	5	0.35	1.75	2500	0.20	5.11	38.11	1.08	33.9

SYMBANG

DIMENSION

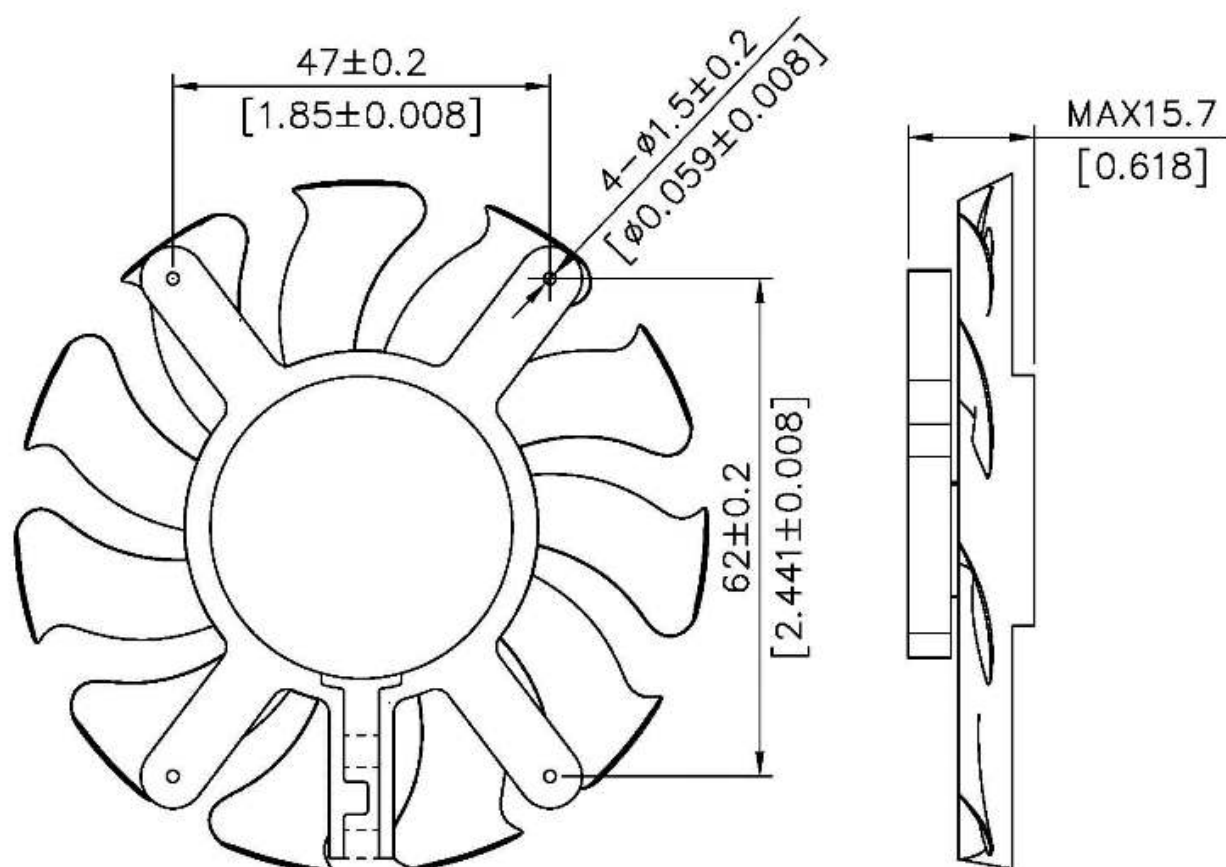

UNIT: mm[inch]

AIR PERFORMANCE

