

ACF

22599-DA



Ø225x99mm (Ø8.86"x3.90")




IMPELLER	Plastic
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-20°C to + 70°C
DIELECTRIC STRENGTH	10M Ω min. @500 VDC
INSULATION RESISTANCE	1,800 VAC for 1 second
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
WEIGHT	1985 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP54 (Special IP Rating On Request)

225mm


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF22599V2L4P-DA	230	0.18/0.22	40/45	1400/1600	0.55/0.79	14/20	347/405	9.83/11.47	59/61
ACF22599V2H2P-DA	230	0.49/0.67	109/145	2500/2500	2.05/2.52	52/64	636/635	18.01/17.98	70/72
ACF22599V1L4P-DA	115	0.39/0.39	40/45	1400/1600	0.55/0.79	14/20	347/405	9.83/11.47	59/61
ACF22599V1H2P-DA	115	0.93/1.30	109/145	2500/2500	2.05/2.52	52/64	636/635	18.01/17.98	70/72

DIMENSION

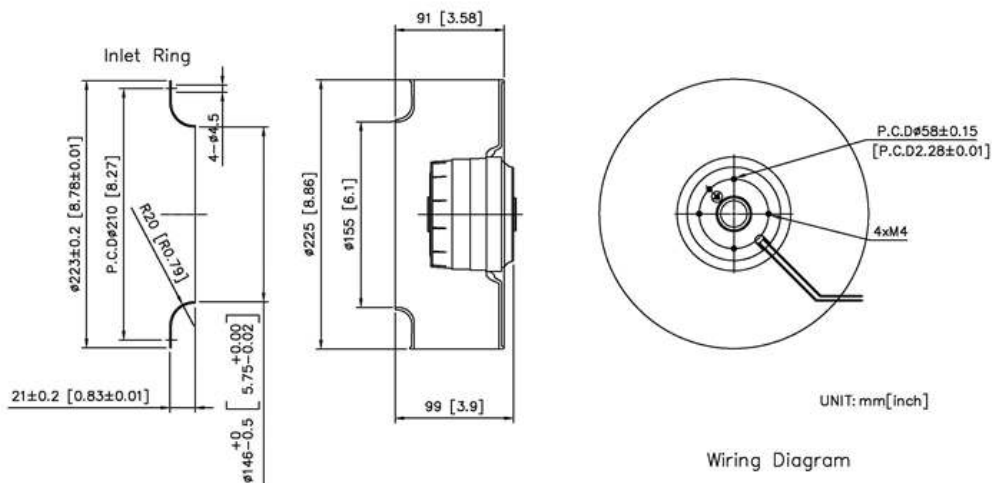

Wiring Diagram



AIR PERFORMANCE

