

DCF

19067-DA

CE

Ø190X67mm(Ø7.48"x2.64")




IMPELLER	Plastic Impeller, Metal Plate
BEARING	Ball
INSULATION	Class B
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
MOTOR TYPE	DC Brushless Fan Motor
SAFETY	Locked Rotor Protection and Polarity Protection
WEIGHT	945 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP54 (Special IP Rating On Request)

190mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DCF19067V48HB-DA	48	1.1	52.8	2800	1.55	39.3	346	9.79	64
DCF19067V24HB-DA	24	2.6	62.4	2800	1.55	39.3	346	9.79	64

DIMENSION

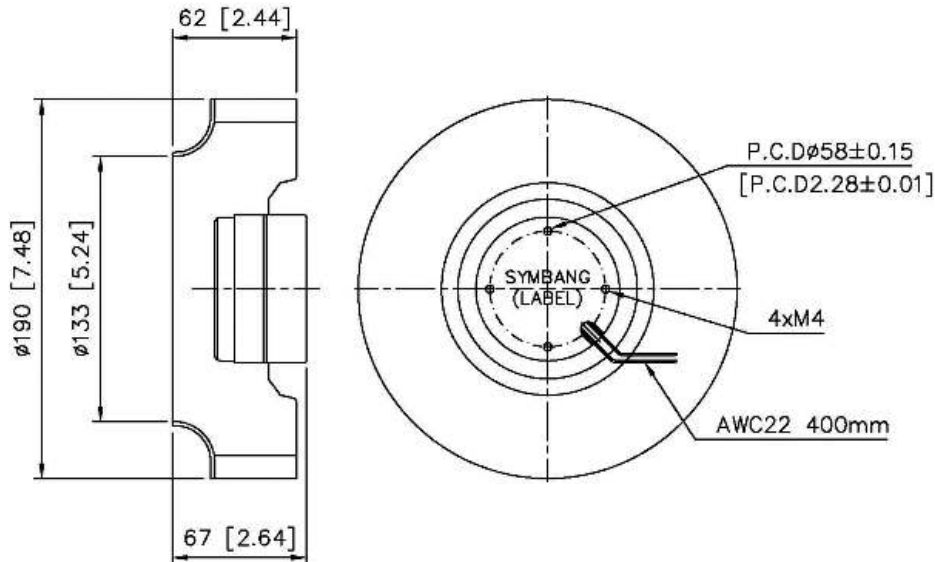

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

