


AFS

50-TC

CE

Ø50mm(Ø1.97")

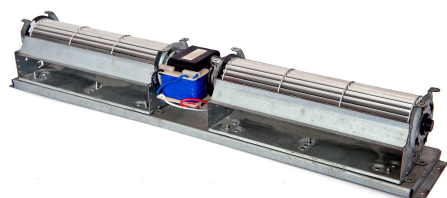


HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø50mm
BEARING	Ball or Sleeve
INSULATION	Class B
OPERATING TEMPERATURE	0°C to + 45°C
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Impedance Protected
MOTOR TYPE	Shaded Pole Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

50mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
©AFS50660V2H-TC	220		45	1800			188	5.3	52

DIMENSION

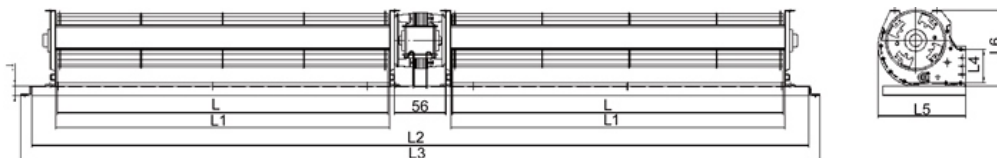

MODEL NO.	DIMENSION(mm)						
	L	L1	L2	L3	L4	L5	L6
AFS50660-TC	300	308	735	760	28	70	70

SYMBANG

AIR PERFORMANCE

