


AFS

60-TC

CE

Ø60mm(Ø2.36")

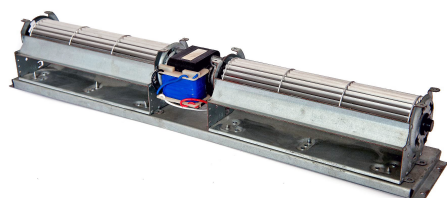


HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø60mm
BEARING	Ball or Sleeve
INSULATION	Class B
OPERATING TEMPERATURE	0°C to + 45°C
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type
	185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	1,500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Impedance Protected
MOTOR TYPE	Shaded Pole Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
©AFS60780V2H-TC	220		35	1560			247	7.0	55
©AFS60420V2H-TC	220		35	1730			138	3.9	52

DIMENSION

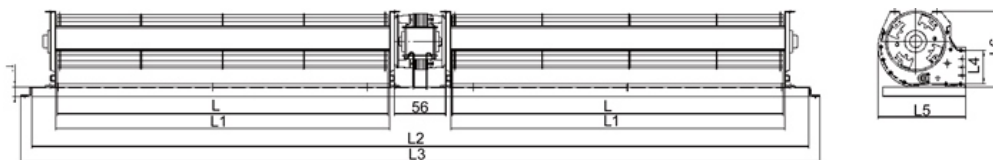

MODEL NO.	DIMENSION(mm)						
	L	L1	L2	L3	L4	L5	L6
AFS60420-TC	180	183	485	510	35.5	95	82
AFS60780-TC	360	363	845	870	35.5	95	82

SYMBANG

AIR PERFORMANCE

