

E

6025-F

CE

60x60x25mm(2.36"x2.36"x0.98")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Plastic
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Thermal Protection
TERMINATION	Terminals or Lead Wire
WEIGHT	60g
ROHS COMPLIANCE	Yes
IP LEVEL	IP55 (Special IP Rating,ex: IP68 On Request)

60mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
E6025V1HB-F	115	0.039	2.0	3850	0.17	4.3	19.1	0.54	31
E6025V2HB-F	230	0.025	2.3	3950	0.18	4.6	19.4	0.55	31
E6025FVHB-F	115/230	0.039/0.025	2.0/2.3	3850/3950	0.17/0.18	4.3/4.6	19.1/19.4	0.54/0.55	31

DIMENSION

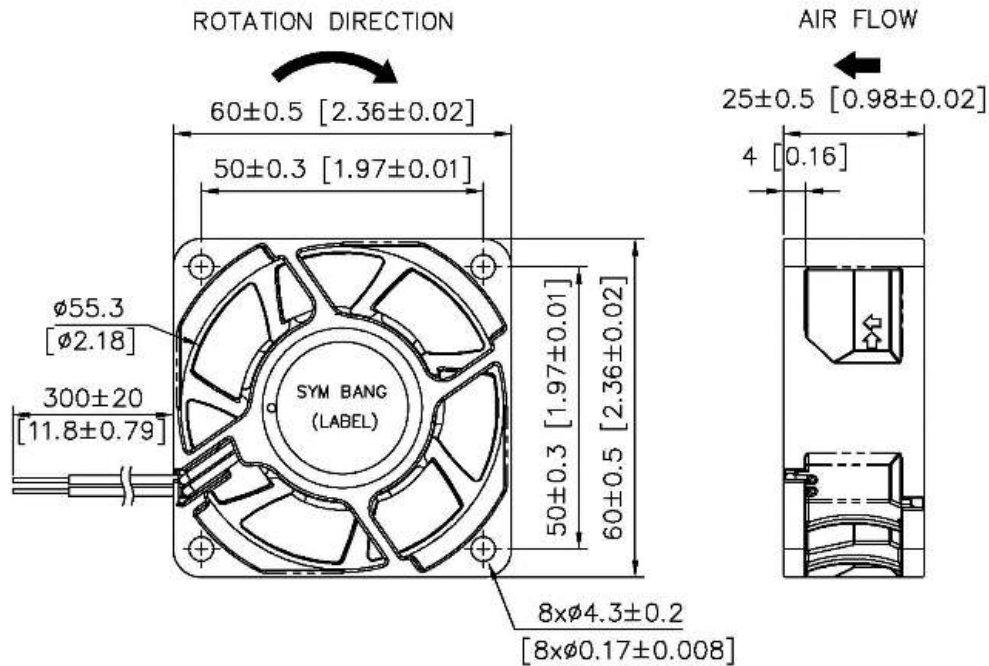

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

