


D

2006-TK

cULusCE

20x20x6mm(0.78"x0.78"0.23")

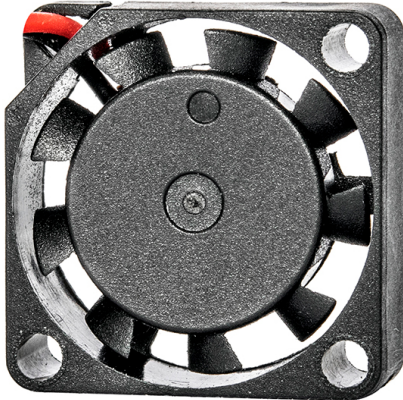

HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-30°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	3.5g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


20mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D2006V12L-TK	12	0.04	0.48	8000	0.08	1.95	0.79	0.02	34.4
D2006V12M-TK	12	0.06	0.72	10000	0.09	2.22	0.95	0.03	37.1
D2006V12H-TK	12	0.10	1.20	12000	0.11	2.69	1.12	0.03	39.4
D2006V5L-TK	5	0.08	0.40	8000	0.08	1.95	0.79	0.02	41.0
D2006V5M-TK	5	0.12	0.60	10000	0.09	2.22	0.95	0.03	42.6
D2006V5H-TK	5	0.16	0.80	12000	0.11	2.69	1.12	0.03	44.7

SYMBANG

DIMENSION

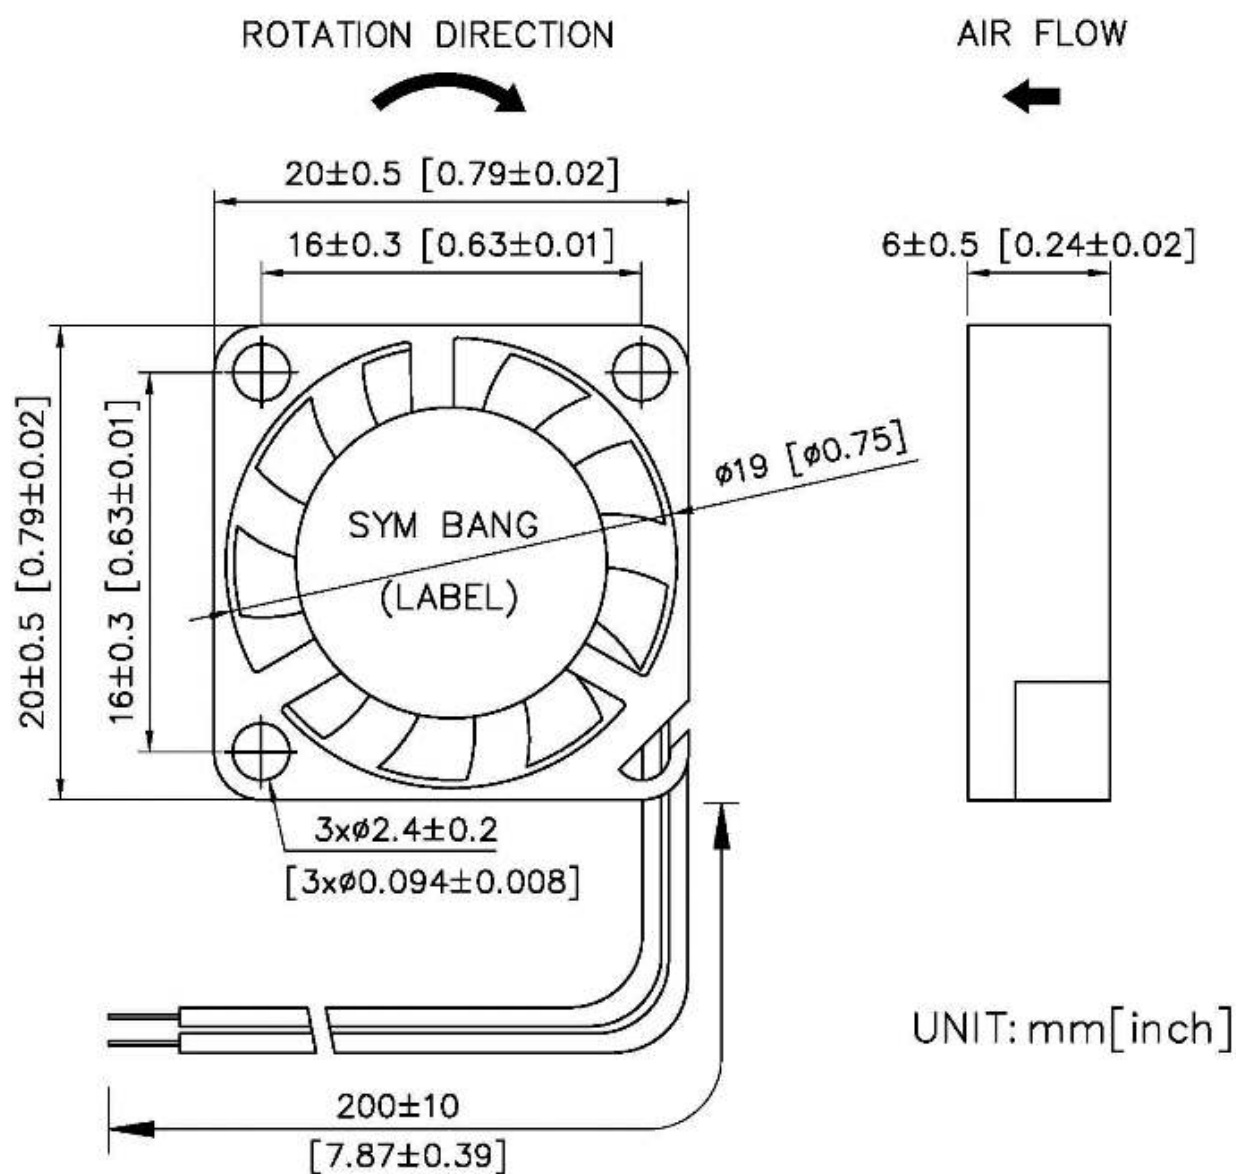

AIR PERFORMANCE

