


D

2010-TK

20x20x10mm(0.78"x0.78"x0.39")

20mm

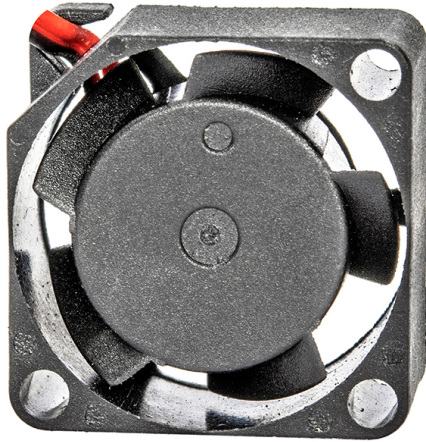


HOUSING	Thermoplastic PBT, UL94V-0
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-30°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	4g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D2010V12L-TK	12	0.03	0.36	10000	0.09	2.16	1.05	0.03	18.8
D2010V12M-TK	12	0.05	0.60	12000	0.10	2.65	1.14	0.03	21.3
D2010V12H-TK	12	0.08	0.96	14000	0.205	5.2	1.6	0.045	27.4
D2010V5L-TK	5	0.06	0.30	10000	0.09	2.16	1.05	0.03	18.8
D2010V5M-TK	5	0.08	0.40	12000	0.10	2.65	1.14	0.03	21.3
D2010V5H-TK	5	0.09	0.45	14000	0.205	5.2	1.6	0.045	27.4

DIMENSION

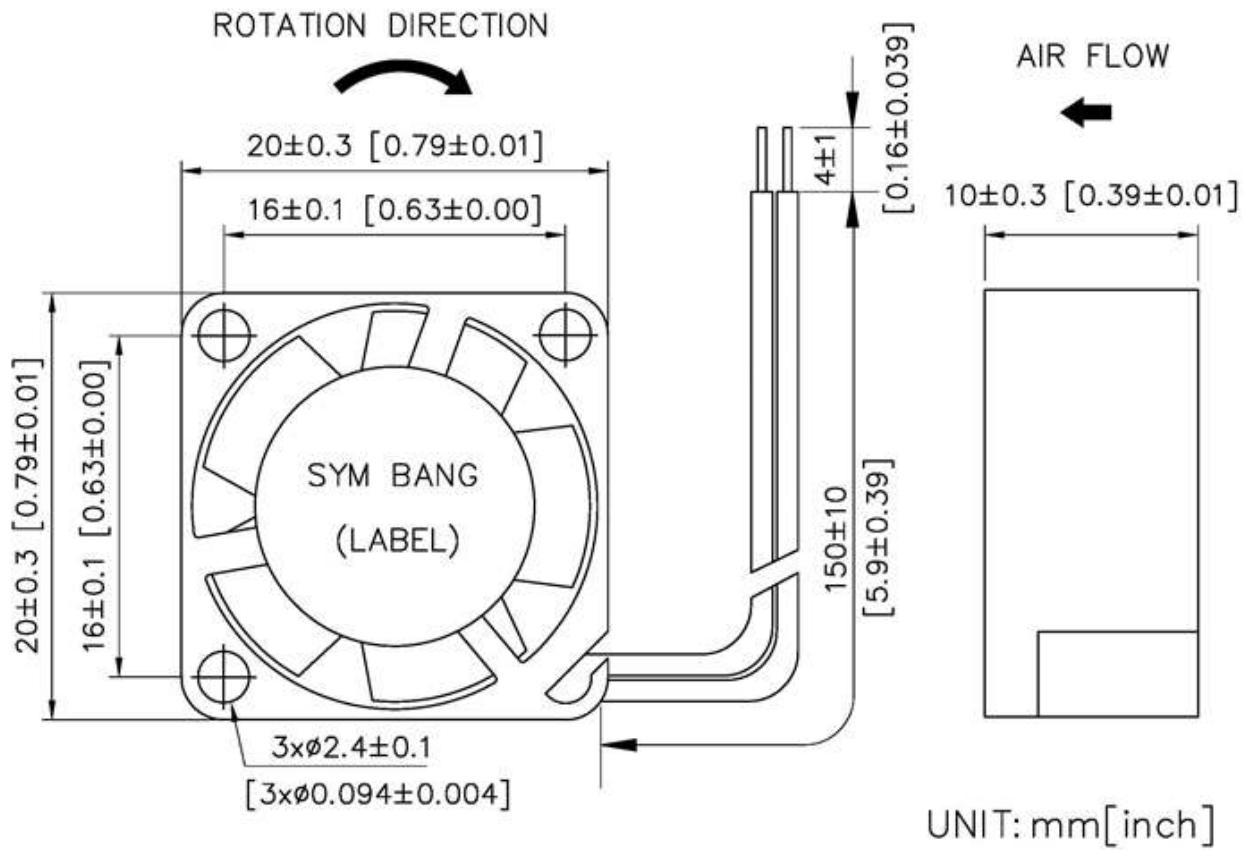

Mounting Panel Cutout
Outlet Side & Inlet Side

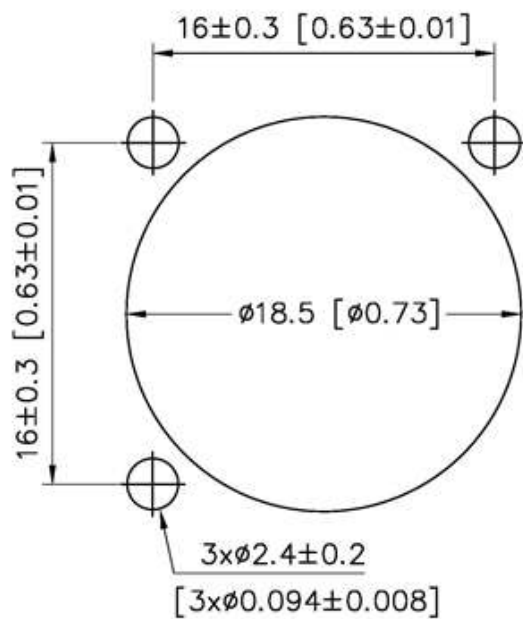

AIR PERFORMANCE

