SYMB MVG

A 20872-7S



HOUSING Aluminum Die Casting, Painted Black

IMPELLER Thermoplastic PBT, UL94V-0 BEARING Ball

OPERATING TEMPERATURE -10°C to + 70°C

INSULATION Class A

OPERATING VOLTAGE RANGE 100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type

DIELECTRIC STRENGTH 5mA Max. at 1500 VAC for 1 second

INSULATION RESISTANCE $10M~\Omega$ min. @500 VDC MOTOR TYPE AC Induction Capacitor Motor SAFETY Thermally Protected

TERMINATION Terminals or Lead Wire WEIGHT 2.5 kg


ROHS COMPLIANCE

IP LEVEL IP21 (Special IP Rating On Request)

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE
					inchH2O	mmH2O	CFM	m3/min	dB(A) @1M
A20872V2H-7S	230	0.43/0.59	95/133	2850/3300	1.06/1.38	27/35	620/700	17.6/19.8	62/67

DIMENSION

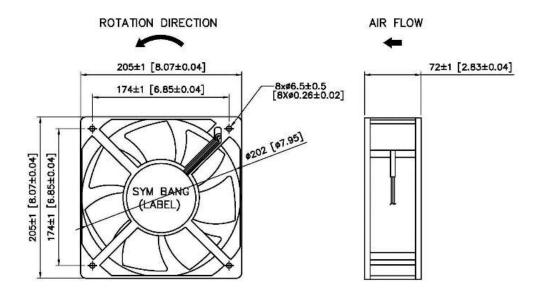

UNIT: mm[inch]

AIR PERFORMANCE

