


DFE 25

CE
Ø25mm(Ø0.99")

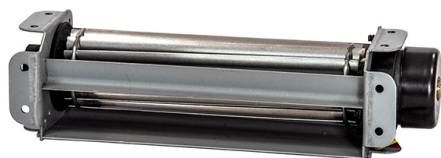


HOUSING	Metal/Aluminum
IMPELLER	Aluminum, Ø25mm
BEARING	Ball
OPERATING TEMPERATURE	0°C to + 45°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	DC Brushless Motor
ROHS COMPLIANCE	Yes
IP LEVEL	Special IP Rating On Request

25 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DFE25298V12H	12	0.21	2.52	2500	0.06	1.6	30	0.85	33
DFE25250V12H	12	0.20	2.40	2600	0.07	1.8	25	0.71	32
DFE25198V12H	12	0.14	1.68	2500	0.05	1.3	18	0.51	28
DFE25160V12H	12	0.13	1.56	2700	0.06	1.4	16	0.45	29
DFE25098V12H	12	0.11	1.32	3100	0.06	1.6	11	0.31	32

DIMENSION

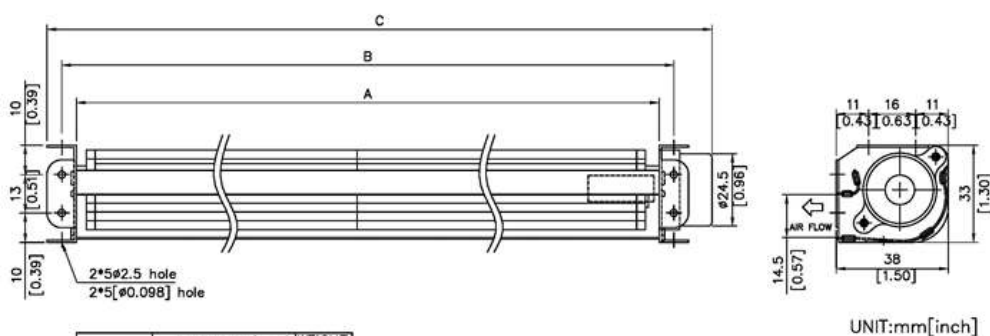

MODEL NO.	DIMENSION(mm)			WEIGHT (g)
	A	B	C	
DFE25098	98	108	128	95
DFE25160	160	170	190	120
DFE25198	198	208	228	140
DFE25250	250	260	280	160
DFE25298	298	308	328	180

SYMBANG

AIR PERFORMANCE

