

ECF

225103-PB



Ø225x103mm(Ø8.7"x4.01")



MOTOR	EC external rotor motor
IMPELLER	Plastic PA66
BEARING	Ball
INSULATION	Class B
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1.9 kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP55


225

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF225103V2HB-PB	220		85	2140	1.41	35.7	815.0	23.1	62

DIMENSION

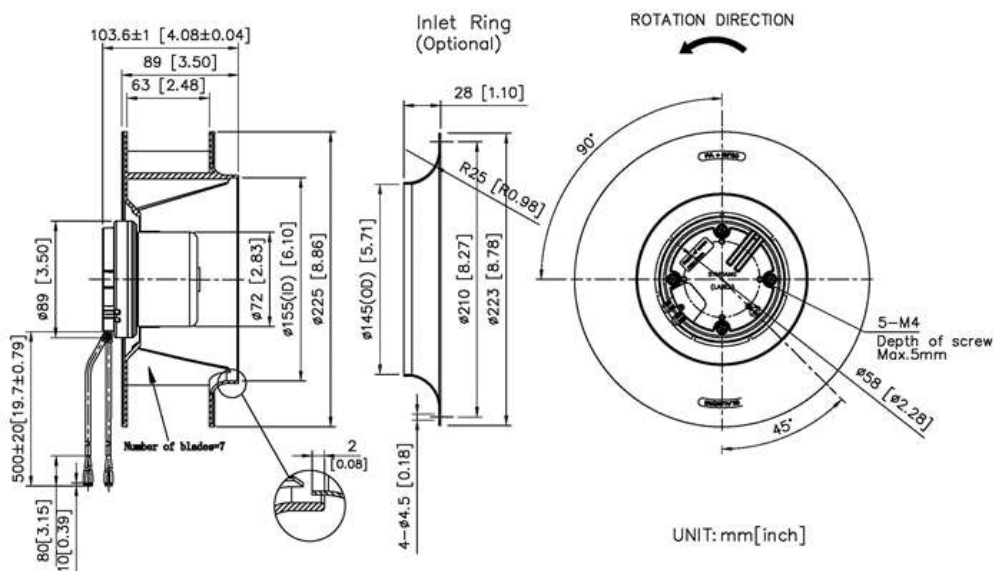

AIR PERFORMANCE

