

ECF

25099-PB



Ø250x99mm(Ø9.75"x3.86")




MOTOR	EC external rotor motor
IMPELLER	Plastic PA66
BEARING	Ball
INSULATION	Class B
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	50M Ω min. @1000 VDC
DIELECTRIC STRENGTH	10mA Max. at 1500 VAC for 5 Second
WEIGHT	1.85 kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP55

250mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF25099V2HB-PB	220/230	1.3	170	2750	3.67	93.3	958.82	27.167	73
ECF25099V1HB-PB	110/115	2.6	170	2750	3.67	93.3	958.82	27.167	73

DIMENSION

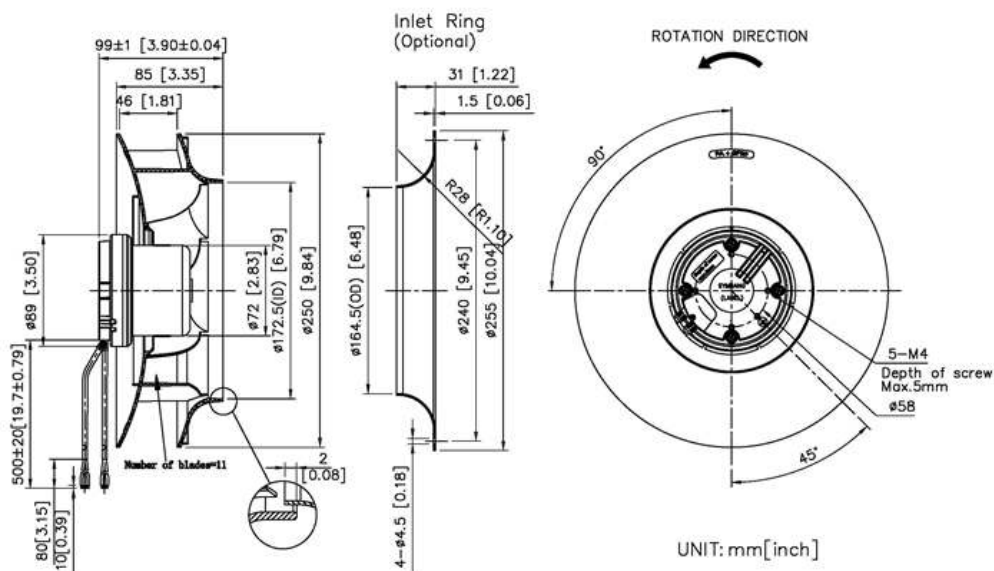

AIR PERFORMANCE

