

A

15050-C

CE

150x150x50 mm(5.91"x5.91"x1.97")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 120 VAC for 115V Type
	200 VAC to 240 VAC for 230V Type
	5mA Max. at 1500 VAC for 1 second
	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	Shaded Pole Motor
INSULATION RESISTANCE	Impedance Protected
MOTOR TYPE	Terminals or Lead wire
SAFETY	920 g
TERMINATION	Yes
WEIGHT	IP21 (Special IP Rating On Request)
ROHS COMPLIANCE	
IP LEVEL	


150

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A15050V2HBL-C	230	0.29/0.25	41.8/34.4	2770/3175	0.38/0.18	9.6/4.5	169/204	4.8/5.8	52/52

DIMENSION

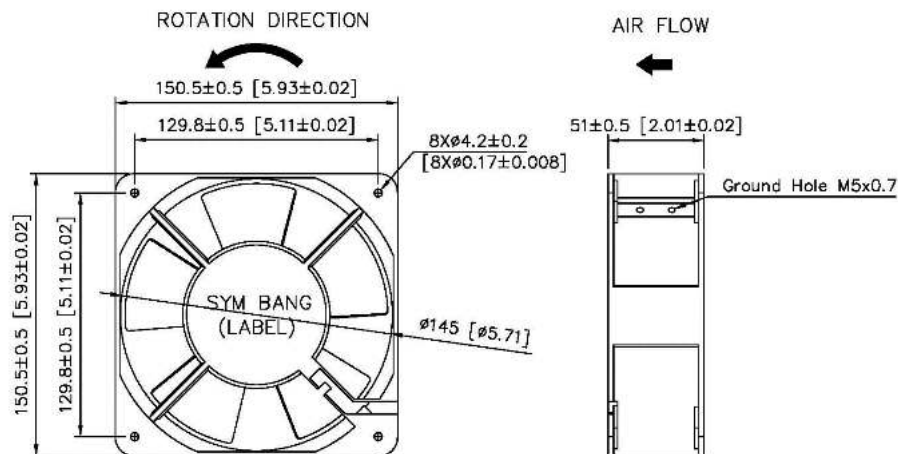

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

