

DB

3004-TK

30x30x4.5mm(1.18"x1.18"x0.18")

CE




HOUSING	UL94V-0
IMPELLER	UL94V-0
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	IP21 (Special IP Rating On Request)
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	6g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

30mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB3004V5HS-TK	5	0.11	0.55	11000	0.42	10.69	0.91	0.025	26.8
DB3004V2HS-TK	2	0.03	0.060	4300	0.046	1.16	0.26	0.007	18.0
DB3004V3HS-TK	3	0.05	0.165	7000	0.120	3.05	0.39	0.011	18.0

DIMENSION

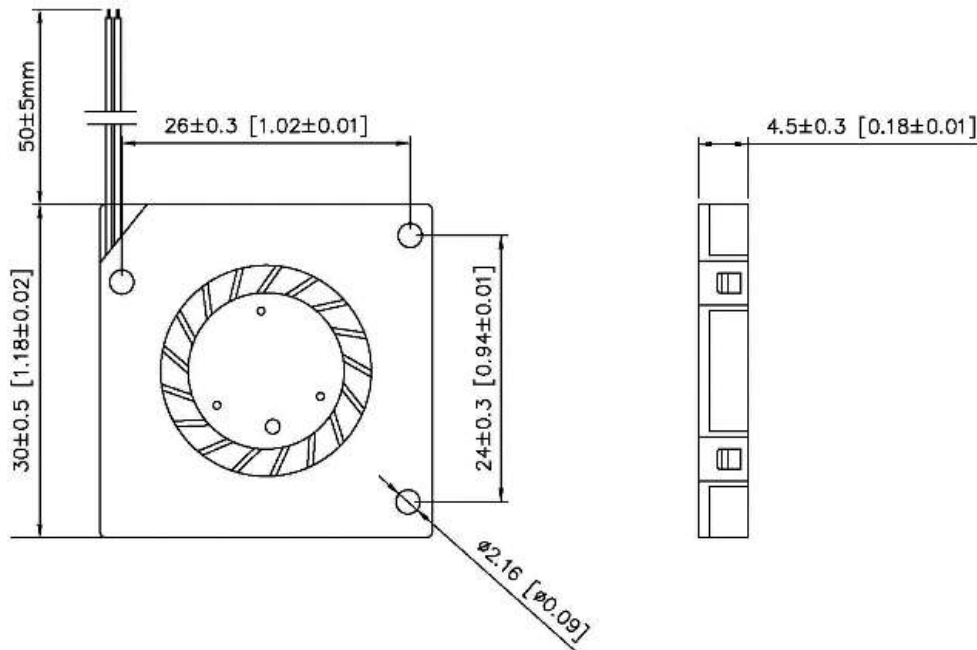

UNIT: mm[inch]

AIR PERFORMANCE

