

A

28080F-DA

CE

280x280x80mm(11.02"x11.02"x3.15")



HOUSING
IMPELLER
BEARING
OPERATING TEMPERATURE
INSULATION
OPERATING VOLTAGE RANGE

Frameless
Metal
Ball
-20°C to + 70°C
Class F
85 VAC to 125 VAC for 115V Type
185 VAC to 245 VAC for 230V Type
5mA Max. at 1500 VAC for 1 second
10M Ω min. @500 VDC
Capacitor
Thermal Protected
Terminals or Lead Wire
3.2 kg
Yes
IP54


280mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A28080V1HF-DA	115	0.81/1.20	95/138	2650/2900	096/0.80	24.5/20.5	1090/1200	30.8/33.9	70/73

SYMBANG

DIMENSION

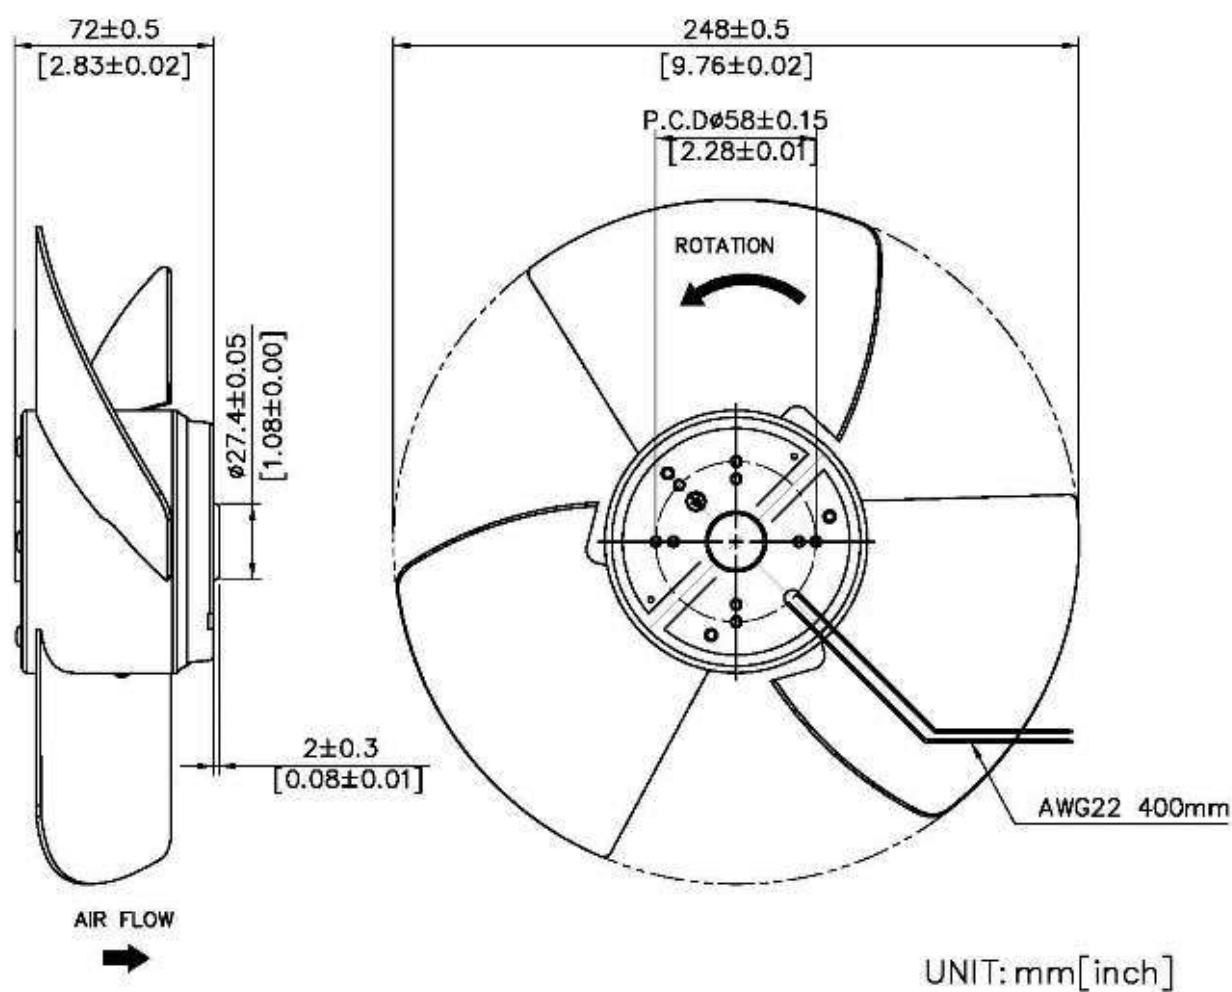

Wiring Diagram

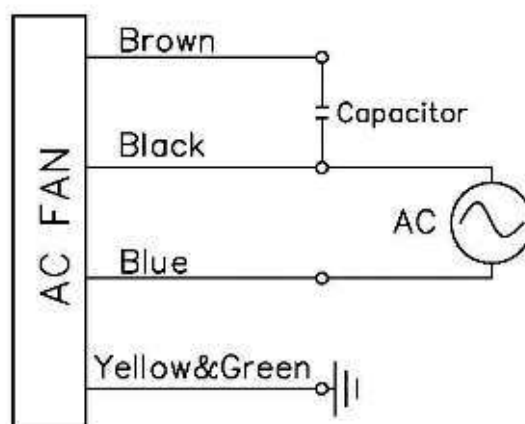

AIR PERFORMANCE

