

D

8056-SU

CE

80x80x56mm(3.15"x3.15"x2.2")




IMPELLER	Plastic Impeller
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
MOTOR TYPE	DC Brushless Fan Motor
SAFETY	Locked Rotor Protection and Polarity Protection
WEIGHT	310 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

80mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D8056V12HB-SU	12	2.40	28.8	12000	5.48	139.1	102.4	2.90	72

DIMENSION

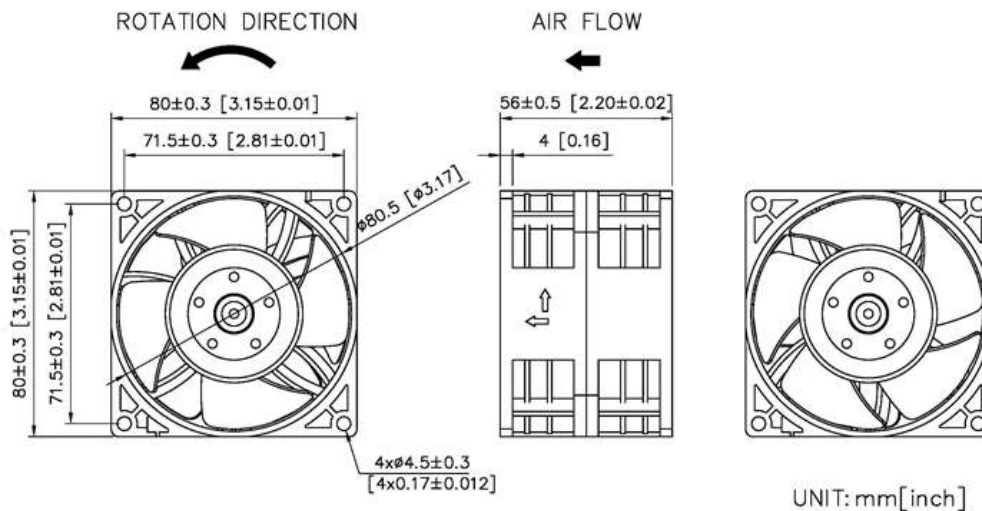

AIR PERFORMANCE

