

D

9525-GF

CE

Ø95x25mm(Ø3.7"x0.97")




HOUSING	Plastic (PBT 30%GF)
IMPELLER	Plastic (PBT 30%GF)
BEARING	Ball,Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	90 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

95 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D9525V12LB-GF	12	0.25	3.0	2000	0.072	1.84	44.19	1.251	23.8
D9525V12MB-GF	12	0.30	3.6	2500	0.125	3.16	64.13	1.815	33.5
D9525V12HB-GF	12	0.50	6.0	3000	0.188	4.76	78.33	2.217	38.8

DIMENSION

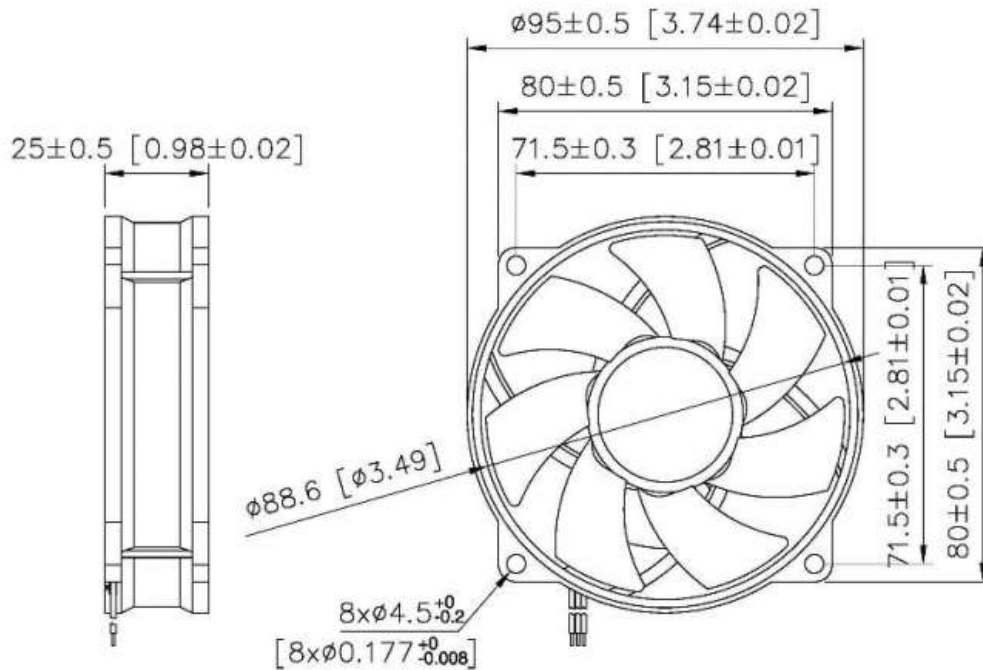

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

