

D

13525-GF

CE

135x135x25mm(5.26"x5.26"x0.98")




HOUSING	Plastic (PBT 30%GF)
IMPELLER	Plastic (PBT 30%GF)
BEARING	Ball, Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	159 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

135mm

SPECIFICATION


MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D13525V12XXL-GF	12	0.20	2.40	900	0.028	0.72	58.35	1.651	17.9
D13525V12XL-GF	12	0.28	3.36	1200	0.038	0.96	75.70	2.142	23.7
D13525V12L-GF	12	0.33	3.96	1500	0.067	1.70	95.18	2.694	29.1
D13525V12M-GF	12	0.45	5.40	1800	0.089	2.26	112.12	3.173	34.2
D13525V12H-GF	12	0.50	6.00	2000	0.114	2.90	127.60	3.611	38.6
D13525V12SL-GF	12	0.50	6.00	2200	0.149	3.77	152.09	4.304	42.0

DIMENSION

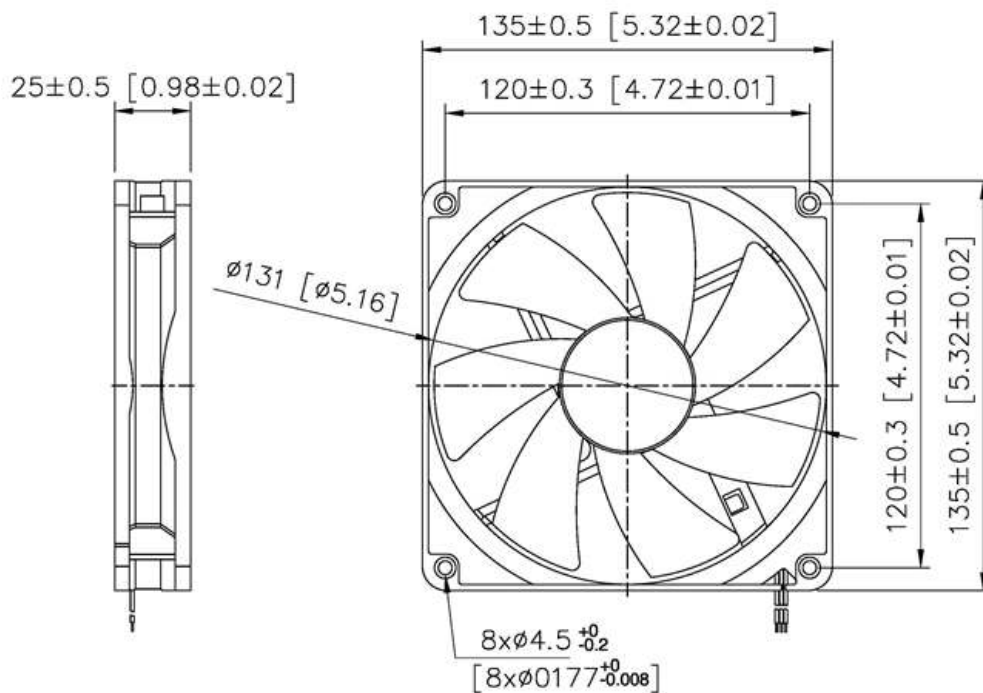

UNIT: mm[inch]

SYMBANG



AIR PERFORMANCE

