

D

13820-GF

CE

138x138x20mm(5.38"x5.38"x0.78")




HOUSING	Plastic (PBT 30%GF)
IMPELLER	Plastic (PBT 30%GF)
BEARING	Ball, Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	142 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

138mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
D13820V12XL-GF	12	0.2	2.4	1200	0.061	1.54	77.43	2.191	23.2
D13820V12L-GF	12	0.3	3.6	1500	0.082	2.08	95.62	2.706	28.2
D13820V12M-GF	12	0.4	4.8	1800	0.116	2.95	112.04	3.171	33.5
D13820V12H-GF	12	0.6	7.2	2100	0.149	3.77	132.46	3.749	38.1
D13820V12SL-GF	12	0.8	9.6	2500	0.179	4.55	157.36	4.453	42.9

DIMENSION

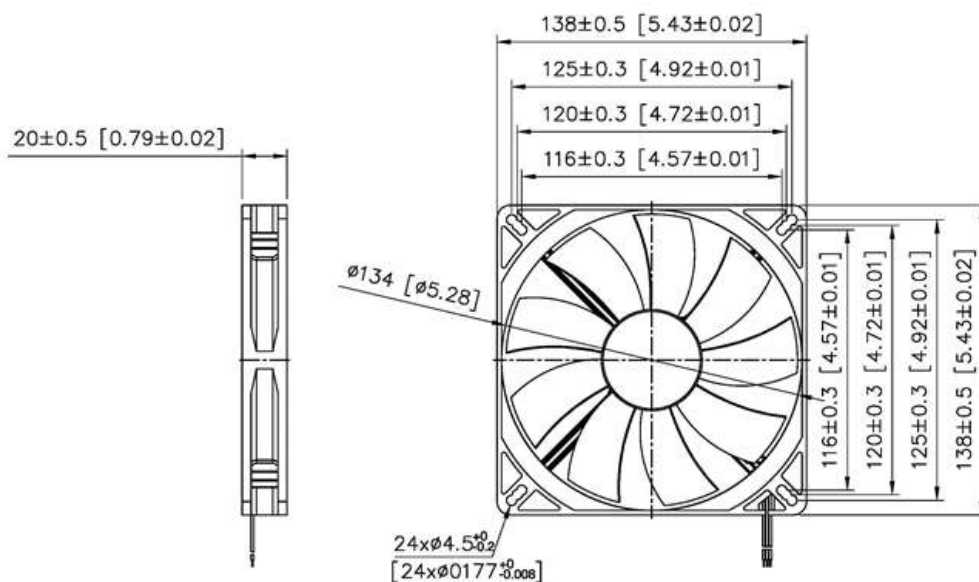

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

