


DB

2003-HY

CE

20x20x3.2mm(0.78"x0.78"x0.12")

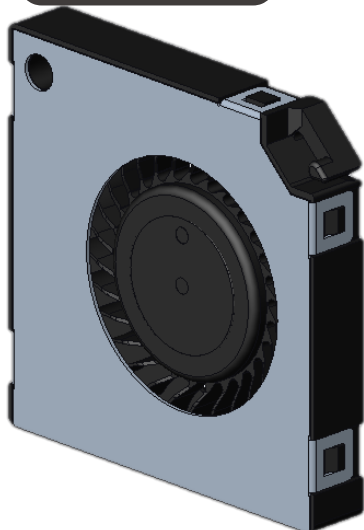


HOUSING	Plastic UL 94V-0 / SUS
IMPELLER	Plastic UL 94V-0 / SUS
BEARING	Sleeve
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @250 VDC
WEIGHT	2.0 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

20mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
DB2003V3HB-HY	3	0.06	0.18	11000	0.189	4.80	0.33	0.009	26.9

DIMENSION

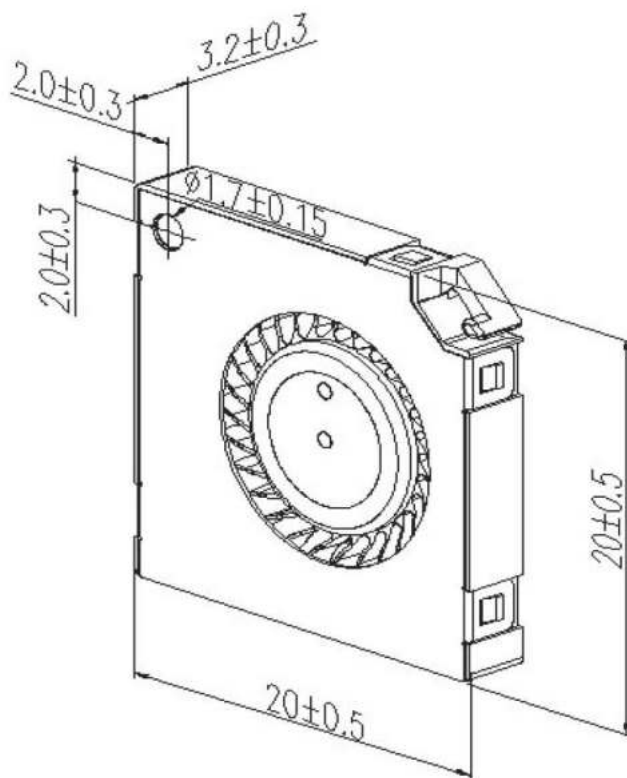

Unit: mm

AIR PERFORMANCE

