


DB

3003-HY

CE
30x30x3.2mm(1.17"x1.17"x0.12")

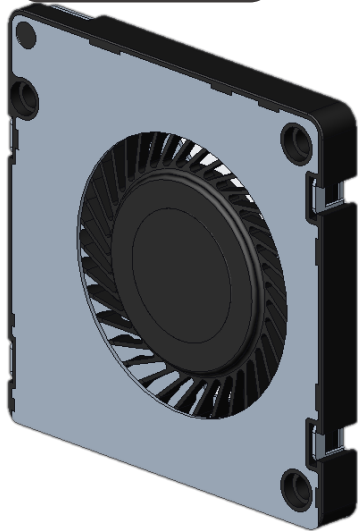


HOUSING	Plastic UL 94V-0 / SUS
IMPELLER	Plastic UL 94V-0 / SUS
BEARING	Hydraulic Bearing
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @250 VDC
WEIGHT	4.5 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

30 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB3003V5HX-HY	5	0.1	0.5	9500	0.343	8.70	0.70	0.020	34.1

DIMENSION

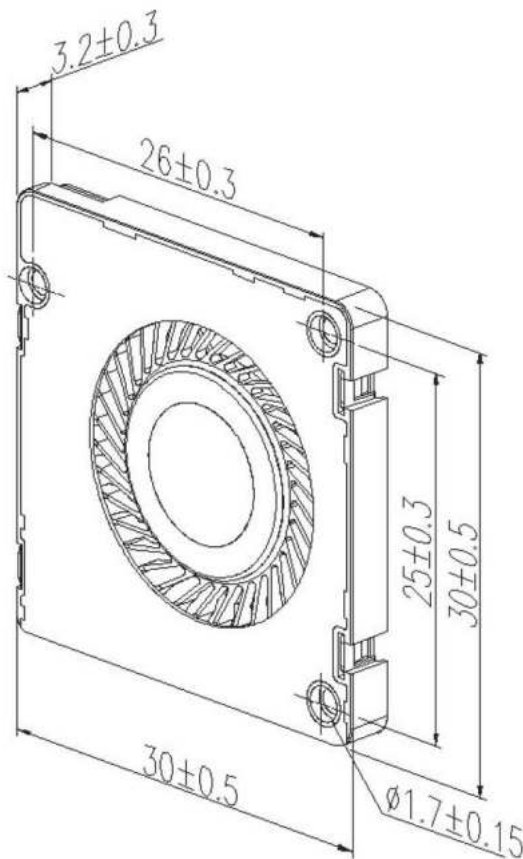

Unit: mm

AIR PERFORMANCE

