


DB

8028-GF

80x80x28mm(3.12"x3.12"x1.09")

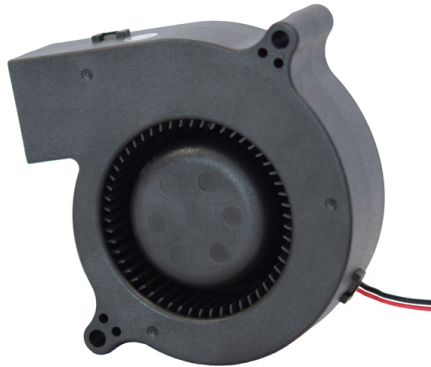

HOUSING	Plastic (PBT 30%GF)
IMPELLER	Plastic (PBT 30%GF)
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M ω min. @500 VDC
WEIGHT	115g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


80

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB8028V24H-GF	24	0.80	19.2	5000	1.070	27.15	17.97	0.509	49.1
DB8028V24SL-GF	24	0.90	21.6	6000	1.548	39.29	21.49	0.608	53.7
DB8028V24SM-GF	24	1.00	24.0	7000	2.175	55.21	25.01	0.708	57.3
DB8028V24SH-GF	24	1.20	28.8	8000	2.565	65.09	28.59	0.809	59.7
DB8028V12L-GF	12	0.32	3.84	3500	0.618	15.68	13.19	0.373	42.9
DB8028V12M-GF	12	0.37	4.44	4000	0.750	19.04	14.56	0.412	45.0
DB8028V12H-GF	12	0.42	5.04	4500	0.880	22.33	15.81	0.447	47.8

DIMENSION

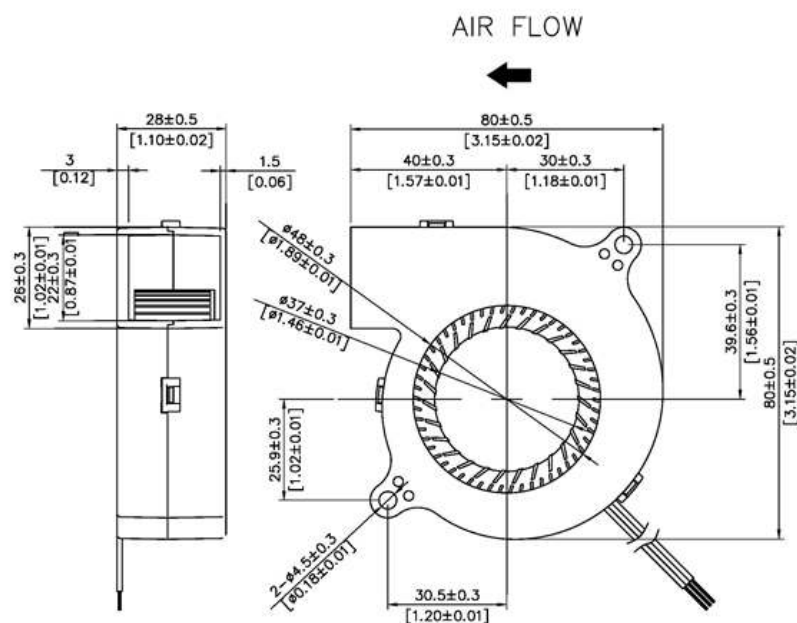

UNIT: mm[inch]

SYMBANG

AIR PERFORMANCE

