

DB

10125-GF

CE

101x101x25mm(3.9"x3.9"x0.97")




HOUSING	Plastic (PBT 30%GF)
IMPELLER	Plastic (PBT 30%GF)
BEARING	Ball or Sleeve
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M ω min. @500 VDC
WEIGHT	136g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

101 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
DB10125V12L-GF	12	0.40	4.8	2400	0.476	12.09	17.15	0.485	44.8
DB10125V12M-GF	12	0.50	6.0	2800	0.665	16.87	19.95	0.565	46.0
DB10125V12H-GF	12	0.65	7.8	3300	0.965	24.50	24.11	0.682	50.0

DIMENSION

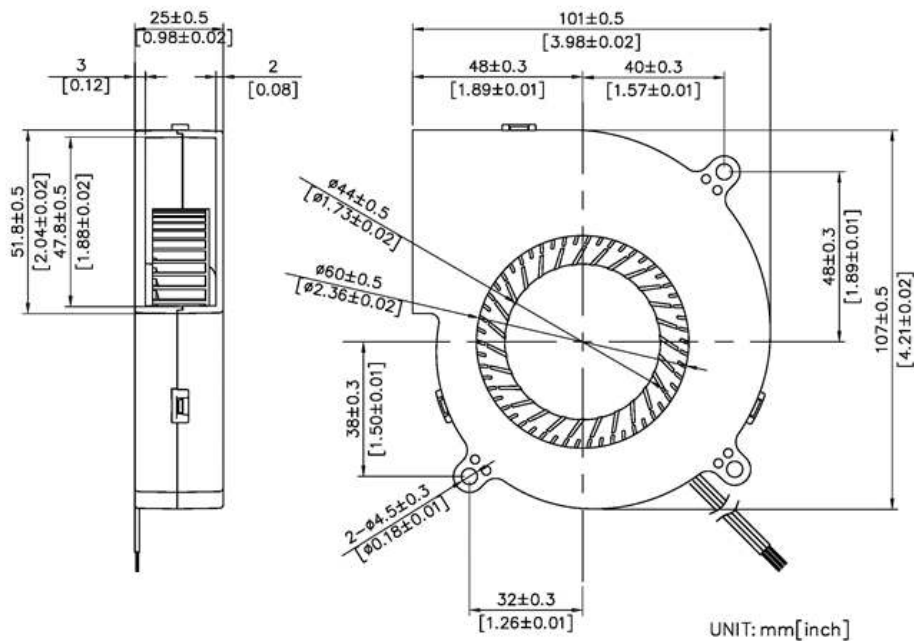

SYMBANG

AIR PERFORMANCE

