

D

20060-TK

200x200x60mm(7.87"x7.87"x2.36")

CE



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT
BEARING	Ball/Sleeve
INSULATION	Class A
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to + 70°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minutes
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	920 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


200mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D20060V48M-TK	48	0.37	17.86	2000	0.26	6.65	400.6	11.4	55
D20060V48H-TK	48	0.66	31.68	2500	0.48	12.15	513.4	14.6	60
D20060V48SL-TK	48	1.07	51.36	3000	0.68	17.28	586.7	16.7	64
D20060V48SM-TK	48	1.67	80.16	3500	0.87	22.02	645.6	18.3	69
D20060V24M-TK	24	0.78	18.82	2000	0.26	6.65	400.6	11.4	55
D20060V24H-TK	24	1.39	33.36	2500	0.48	12.15	513.4	14.6	60
D20060V24SL-TK	24	2.25	54.0	3000	0.68	17.28	586.7	16.7	64
D20060V24SM-TK	24	3.52	84.38	3500	0.87	22.02	645.6	18.3	69
D20060V12M-TK	12	1.65	19.8	2000	0.26	6.65	400.6	11.4	55
D20060V12H-TK	12	2.92	35.04	2500	0.48	12.15	513.4	14.6	60
D20060V12SL-TK	12	4.73	56.76	3000	0.68	17.28	586.7	16.7	64
D20060V12SM-TK	12	7.4	88.8	3500	0.87	22.02	645.6	18.3	69

DIMENSION

SYMBANG

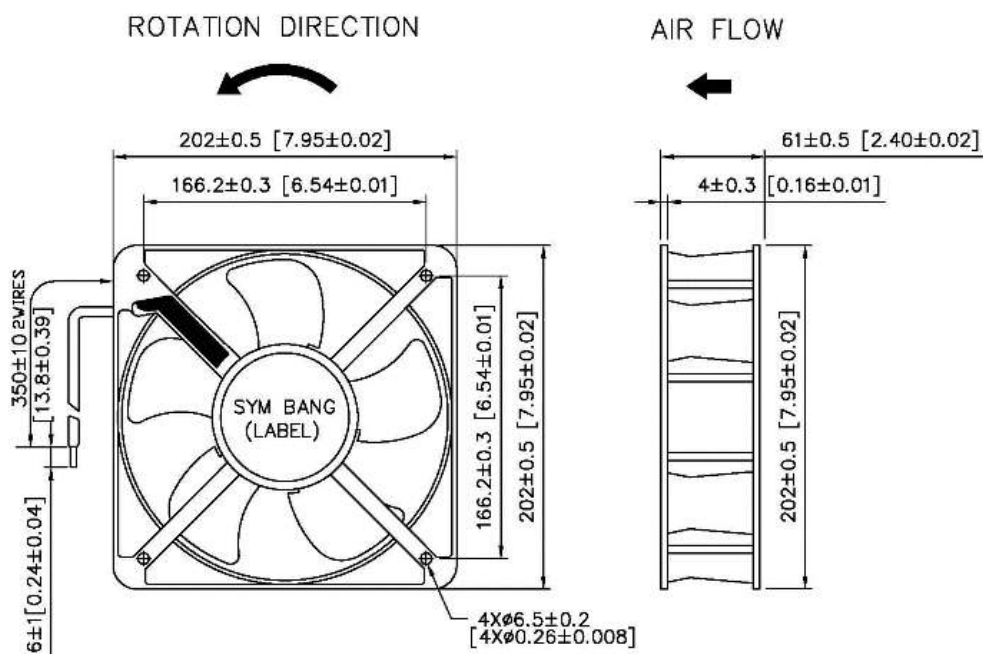

UNIT: mm[inch]

AIR PERFORMANCE

