

ACB

220130-B



220x244x96.5mm(8.66"x9.61"x3.8")





MOTOR	Outer rotor motor Ø 92mm
HOUSING	Steel Painted Black Scroll
IMPELLER	Steel
BEARING	Ball
INSULATION	Class F
OPERATING TEMPERATURE	-10°C to + 65°C
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Thermally Protected
WEIGHT	3.2 kg
ROHS COMPLIANCE	Yes
IP LEVEL	IP44 (Special IP Rating On Request)

220mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACB220130V1H-B	115	2.40	260	2000	2.24	56.9	360.00	10.19	65.0
ACB220130V2H-B	230	1.00	210	2000	2.24	56.9	360.00	10.19	65.0

DIMENSION

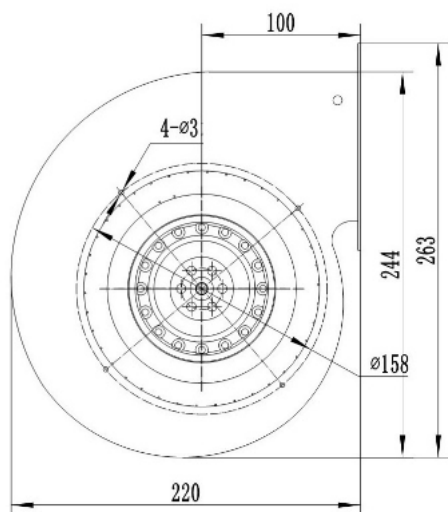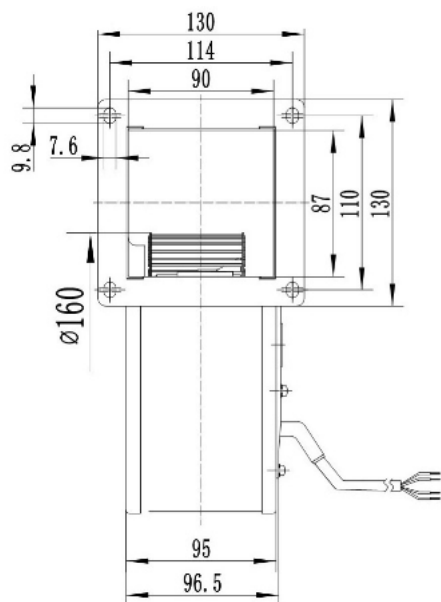

Unit :mm

AIR PERFORMANCE

