


ACF

280125-DQ



Ø280x125mm(Ø11.02"x4.92")

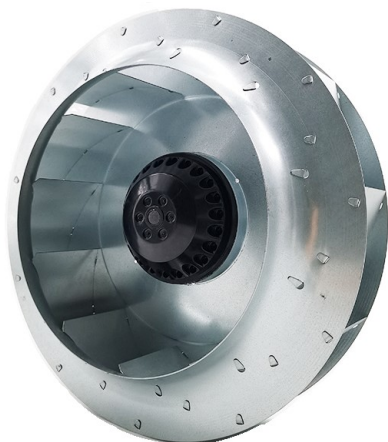




IMPELLER	Galvanized Sheet
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally-Protected
WEIGHT	3.1 Kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP54 (Special IP Rating On Request)

280mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ACF280125V2H2P-DQ	230	1.1	225	2500	2.09	53	1150	32.54	73

DIMENSION

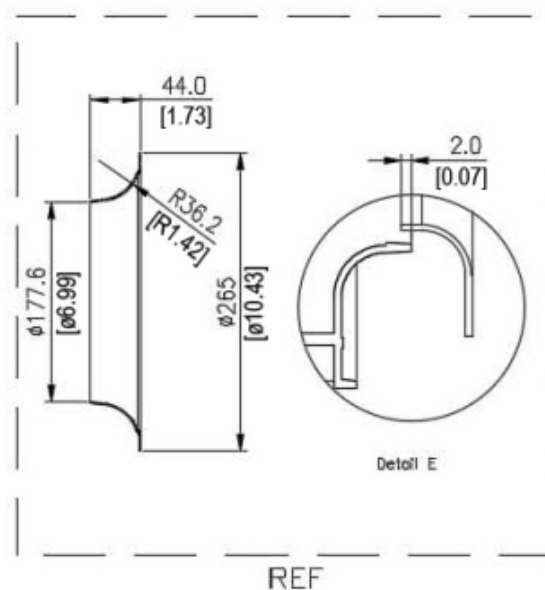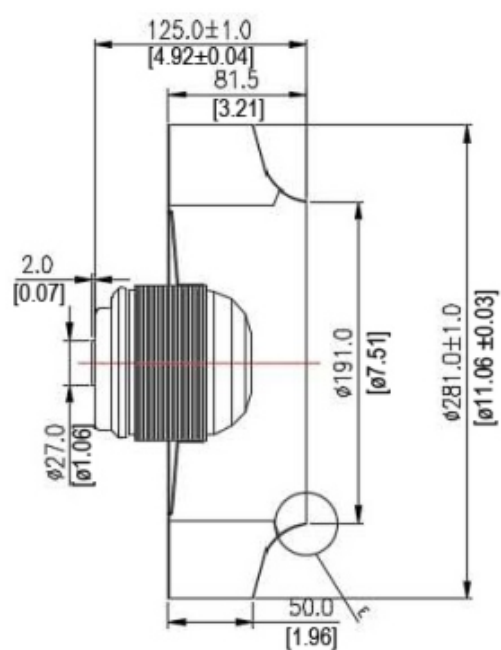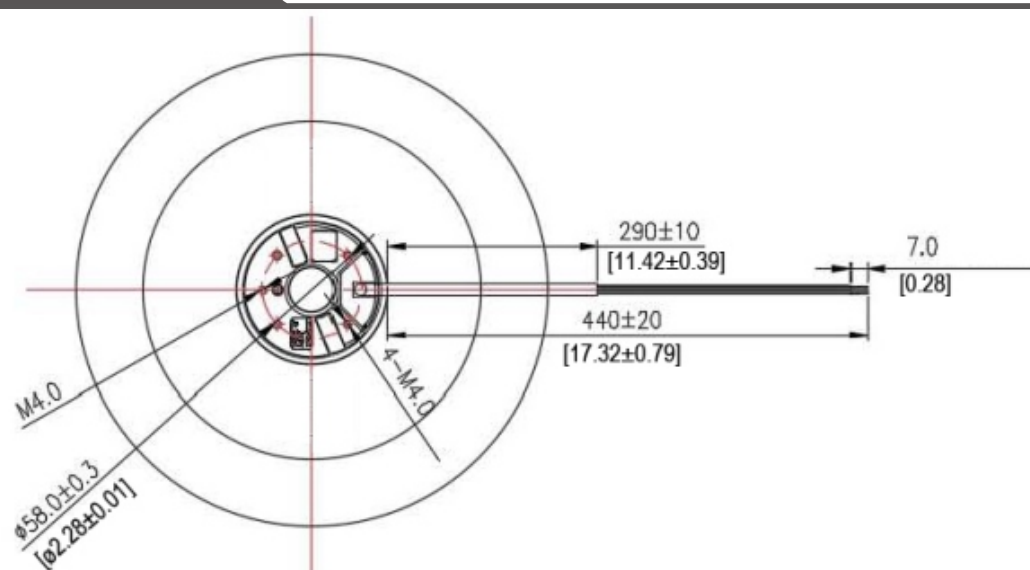

UNIT: mm [inch]

AIR PERFORMANCE

