

D

14038-TK

CE
140x140x38mm(5.51"x5.51"x1.5")



IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
INSULATION	Class F
TERMINATION	Lead Wire
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1
MOTOR TYPE	DC Brushless Fan Motor
SAFETY	Locked Rotor Protection and Polarity Protection
WEIGHT	450 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)


140mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D14038V24L-TK	24	0.17	4	1900	0.2	5.2	117.1	3.3	38.0
D14038V48H-TK	48	0.56	27	3500	0.78	19.7	221.6	6.27	58.8
D14038V48M-TK	48	0.18	9	2600	0.38	9.4	159.2	4.51	46.0
D14038V48L-TK	48	0.08	4	1900	0.21	5.2	117.1	3.31	38.0
D14038V48SL-TK	48	0.86	41	4500	1.19	30.3	282.6	8.00	67.5
D14038V48SM-TK	48	1.3	62	5500	1.81	4.9	348.2	10.71	77.2
D14038V48SH-TK	48	1.5	72	6000	2.01	51.1	377.6	10.71	77.2
D14038V24M-TK	24	0.37	9	2600	0.38	9.4	159.2	4.51	46.0
D14038V24H-TK	24	1.12	27	3500	0.78	19.7	221.6	6.27	58.8
D14038V24SL-TK	24	1.72	41	4500	1.19	30.3	282.6	8.00	67.5
D14038V24SM-TK	24	2.6	62	5500	1.81	45.9	348.2	9.85	74.0
D14038V24SH-TK	24	3	72	6000	2.01	51.1	378.6	10.71	77.2
D14038V12L-TK	12	0.33	4	1900	0.21	5.2	117.1	3.31	38.0
D14038V12M-TK	12	0.73	9	2600	0.38	9.4	159.2	4.51	46.0
D14038V12H-TK	12	2.24	27	3500	0.78	19.7	221.6	6.27	58.8
D14038V12SL-TK	12	3.44	41	4500	1.19	30.3	282.6	8.00	67.5
D14038V12SM-TK	12	5.2	62	5500	1.81	45.9	348.2	9.85	74.0
D14038V12SH-TK	12	6	72	6000	2.01	51.1	378.6	10.71	77.2

DIMENSION

SYMBANG

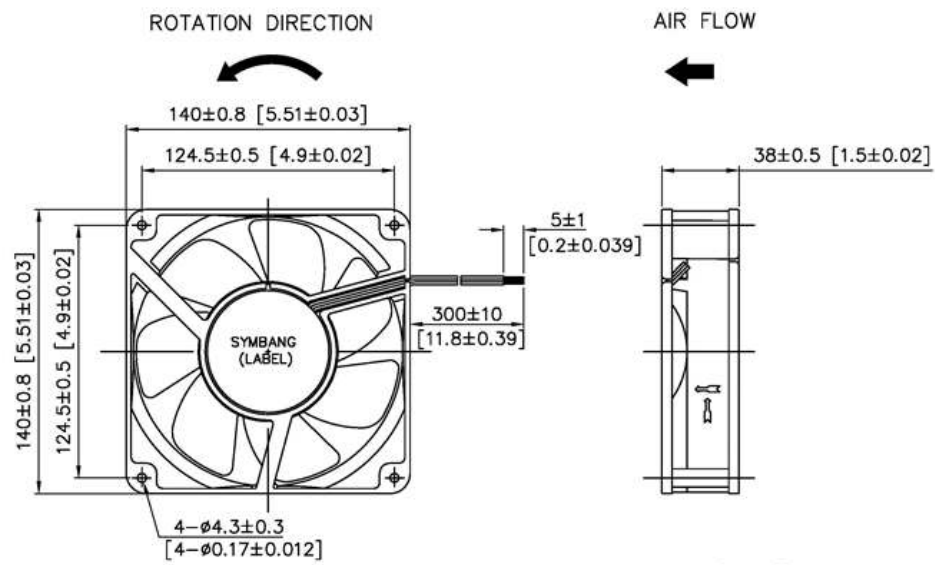

UNIT: mm[inch]

AIR PERFORMANCE

