


ECP

225175V2HB-CE

LO

225x202x93.6mm(8.8"x7.9"x3.7")

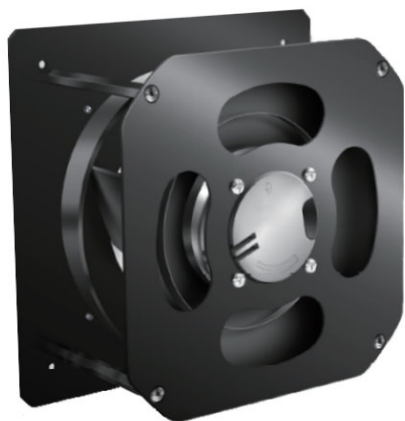

HOUSING	Engineer PP Plastic
IMPELLER	Axial Flow Type, ABS Plastic
BEARING	Ball
MOTOR TYPE	Single Phase Ball Bearing Motor
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	100 VAC ~ 125 VAC for 115V Type 200 VAC ~ 245 VAC for 230V Type
DIELECTRIC STRENGTH	1500 VAC for 1 second
INSULATION	Class B
INSULATION RESISTANCE	10M Ohms min. @500VDC
OPERATING TEMPERATURE	-20°C to + 60°C
SAFETY	Thermally Protected
WEIGHT	2000 g
ROHS COMPLIANCE	Yes


225

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECP225175V2HB-LO	230	1.2	170	4760	3.42	86.7	521.2	14.75	71

DIMENSION

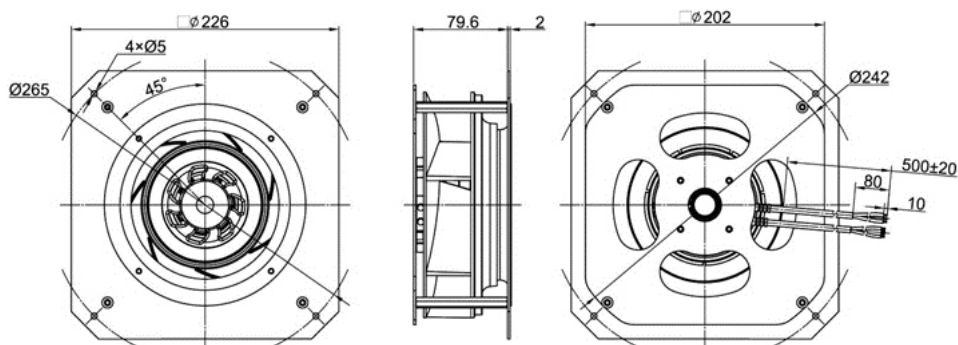

Unit : mm

AIR PERFORMANCE

