


ECP

270225V2HB-CE

LO

270x245.5x113.3mm(10.5"x9.6"x4.4")

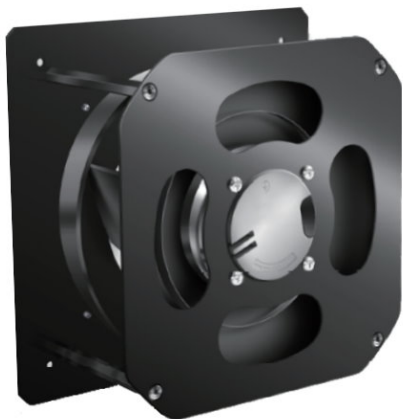


HOUSING	Engineer PP Plastic
IMPELLER	Axial Flow Type, ABS Plastic
BEARING	Ball
MOTOR TYPE	Single Phase Ball Bearing Motor
TERMINATION	Lead Wire
OPERATING VOLTAGE RANGE	100 VAC ~ 125 VAC for 115V Type 200 VAC ~ 245 VAC for 230V Type
DIELECTRIC STRENGTH	1500 VAC for 1 second
INSULATION	Class B
INSULATION RESISTANCE	10M Ohms min. @500VDC
OPERATING TEMPERATURE	-20°C to + 60°C
SAFETY	Thermally Protected
WEIGHT	2000 g
ROHS COMPLIANCE	Yes

270mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECP270225V2HB-LO	230	0.7	85	2450	1.61	40.8	689.05	19.5	65

DIMENSION

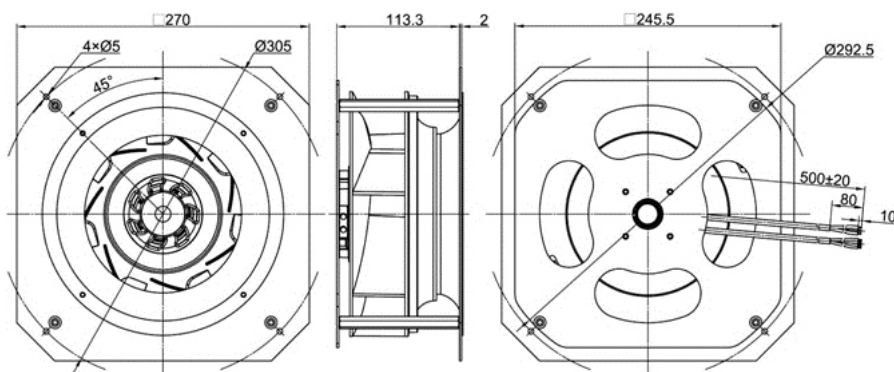

Unit : mm

AIR PERFORMANCE

