# **270225V2HB-**<sup>€</sup> **LO1**

270x244x117.6mm(10.5"x9.5"x4.6")



HOUSING Engineer PP Plastic IMPELLER Axial Flow Type, ABS Plastic BEARING MOTOR TYPE Single Phase Ball Bearing Motor

TERMINATION Lead Wire OPERATING VOLTAGE RANGE 100 VAC ~ 125 VAC for 115V Type 200 VAC ~ 245 VAC for 230V Type

DIELECTRIC STRENGTH 1500 VAC for 1 second INSULATION Class B INSULATION RESISTANCE 10M Ohms min. @500VDC-20°C to + 60°C OPERATING TEMPERATURE Thermally Protected 2000 g


Yes

WEIGHT ROHS COMPLIANCE

### **SPECIFICATION**

| MODEL NO.         | RATED<br>VOLTAGE(V) | RATED<br>CURRENT(A) | INPUT<br>POWER(W) | SPEED<br>(RPM) | MAX. AIR PRESSURE |       | MAX. AIR FLOW |        | NOISE        |
|-------------------|---------------------|---------------------|-------------------|----------------|-------------------|-------|---------------|--------|--------------|
|                   |                     |                     |                   |                | inchH2O           | mmH2O | CFM           | m3/min | dB(A)<br>@1M |
| ECP270225V2HB-LO1 | 230                 | 1.26                | 168               | 2950           | 3.94              | 100   | 700.82        | 19.83  | 70           |

#### **DIMENSION**

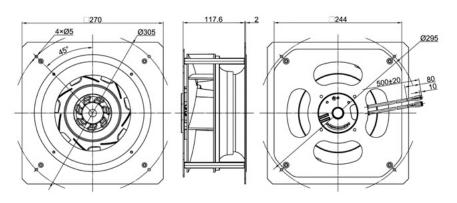

Unit: mm

## AIR PERFORMANCE

