D 17225-TK

172x150x25mm(6.77"x5.91"x0.98")

HOUSING	Aluminum Die Casting, Painted Blabk
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 60°C
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
INSULATION RESISTANCE	10M Ω min. @500 VDC
WEIGHT	361.2 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)

172 mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
D17225V24HB-TK	24	0.68	16	3000	0.41	10.5	181.22	5.13	54.1

DIMENSION

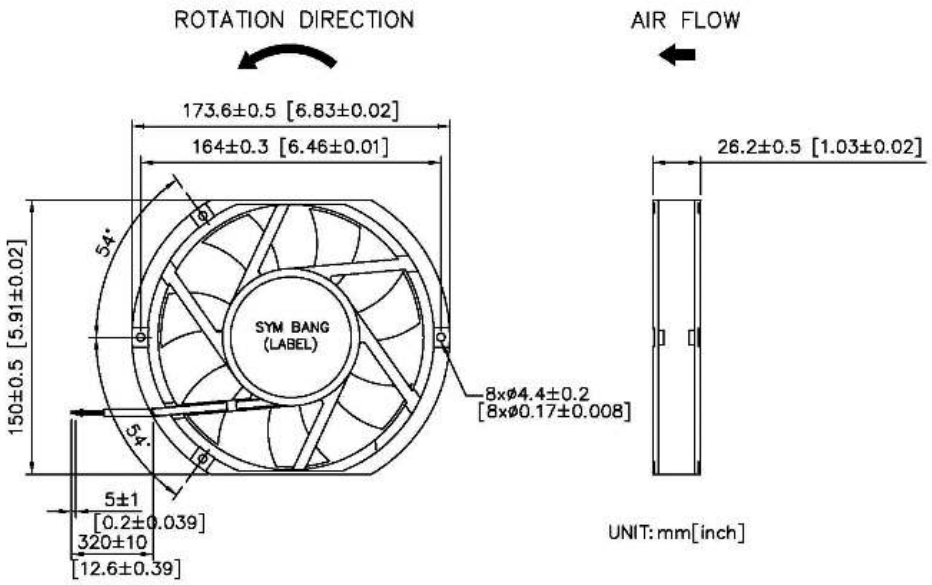

SYM BANG

AIR PERFORMANCE

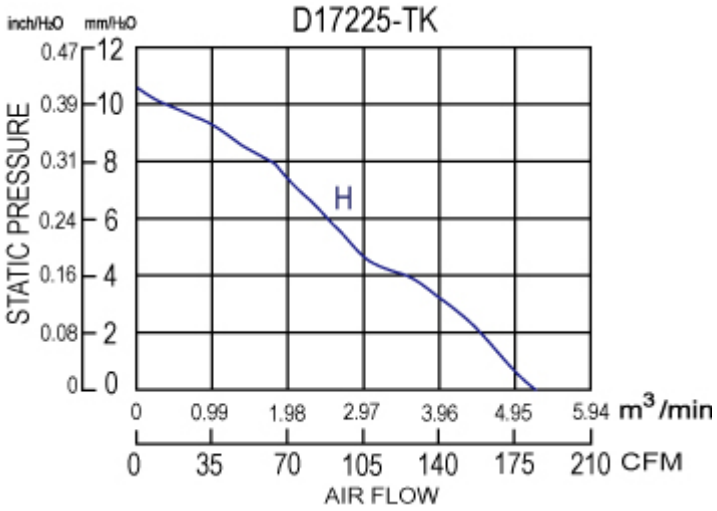

SYM BANG