


ECP

400255V3HB

T-PB



400x400x254.5mm(15.75"x15.75"x10.02")

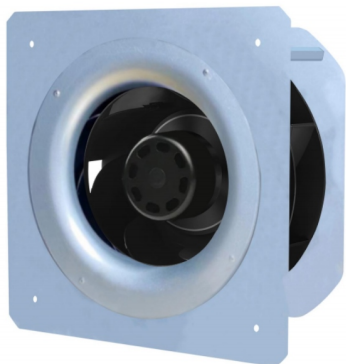

HOUSING
IMPELLER
BEARING
MOTOR TYPE
TERMINATION
OPERATING VOLTAGE RANGE

Metal
Metal
Ball
EC Motor
Lead Wire
320 VAC ~ 460 VAC
10mA Max. at 1500 VAC for 5 sec

DIELECTRIC STRENGTH
INSULATION
INSULATION RESISTANCE
OPERATING TEMPERATURE
SAFETY
WEIGHT
ROHS COMPLIANCE

Class F
50M Ohms min. @1000VDC
-25°C to + 60°C
Locked-rotor Protection
Yes


400

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECP400255V3HBT-PB	3Ø 380	1.17	750	4100	5.62	142.7	1764.7	50.0	91

DIMENSION

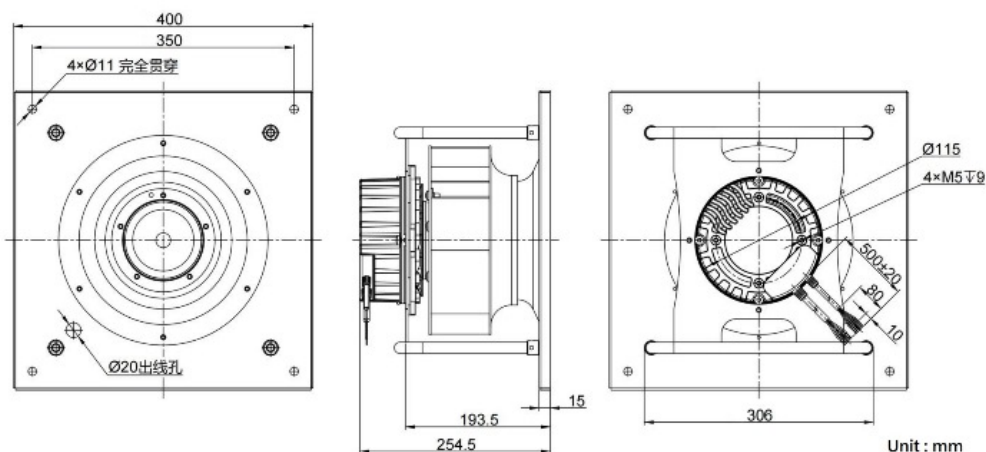

SYMBANG

AIR PERFORMANCE

