


ECF

133110-Y

CE

Ø133x110mm(Ø5.24"x4.33")

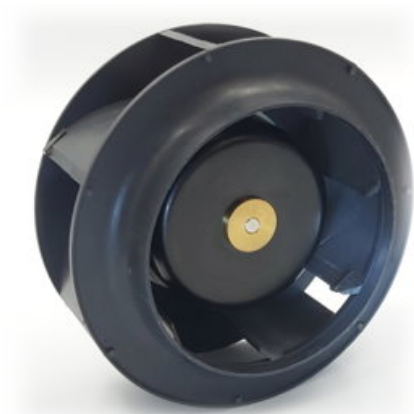


MOTOR	Die-casting Aluminum
IMPELLER	Glass fiber-reinforced polypropylene
BEARING	Ball
OPERATING TEMPERATURE	-25°C to + 60°C
INSULATION RESISTANCE	10M Ω min. @500 VDC
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 minute
WEIGHT	1150g
ROHS COMPLIANCE	Yes
IP LEVEL	IP65(Special IP Rating On Request)

133mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
ECF133110V2HB-Y	230	0.95	108	6040	3.86	97.9	289.0	8.18	74.3

DIMENSION

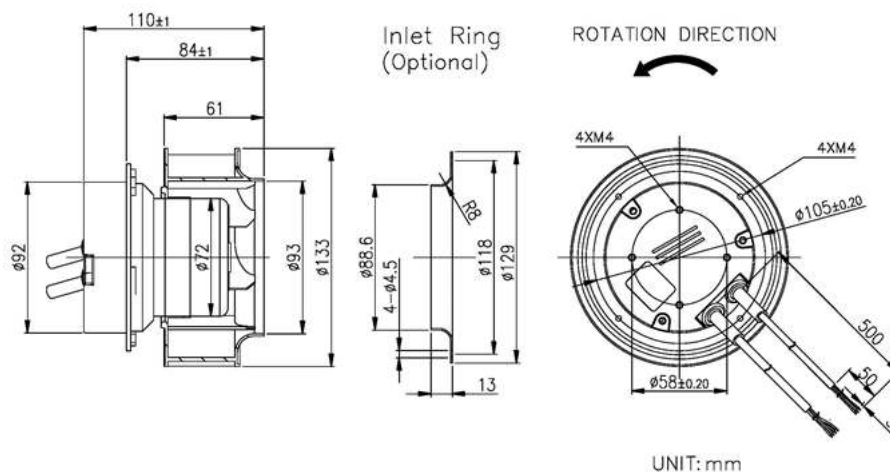

AIR PERFORMANCE

